



New DPX³

Precise protection and measurement


MOULDED CASE CIRCUIT BREAKERS FROM 16 TO 250 A





The new DPX³ range of MCCBs is one of a series of Legrand solutions for providing improved protection and control of all your low voltage installations.

DPX³ is the ideal solution if you are looking for reliable, safe and precise protection for people and property, good continuity of service, easy installation, freedom of layout and easy maintenance and adjustment. The technological innovations incorporated in the product provide you with improved remote control and easy access to the electrical parameters or the energy consumption in your installation. In this document you will learn about the numerous advantages of the DPX³/DPX range, which is suitable for all your requirements in terms of selecting, designing or creating electrical panels, investment, or operating the installation.

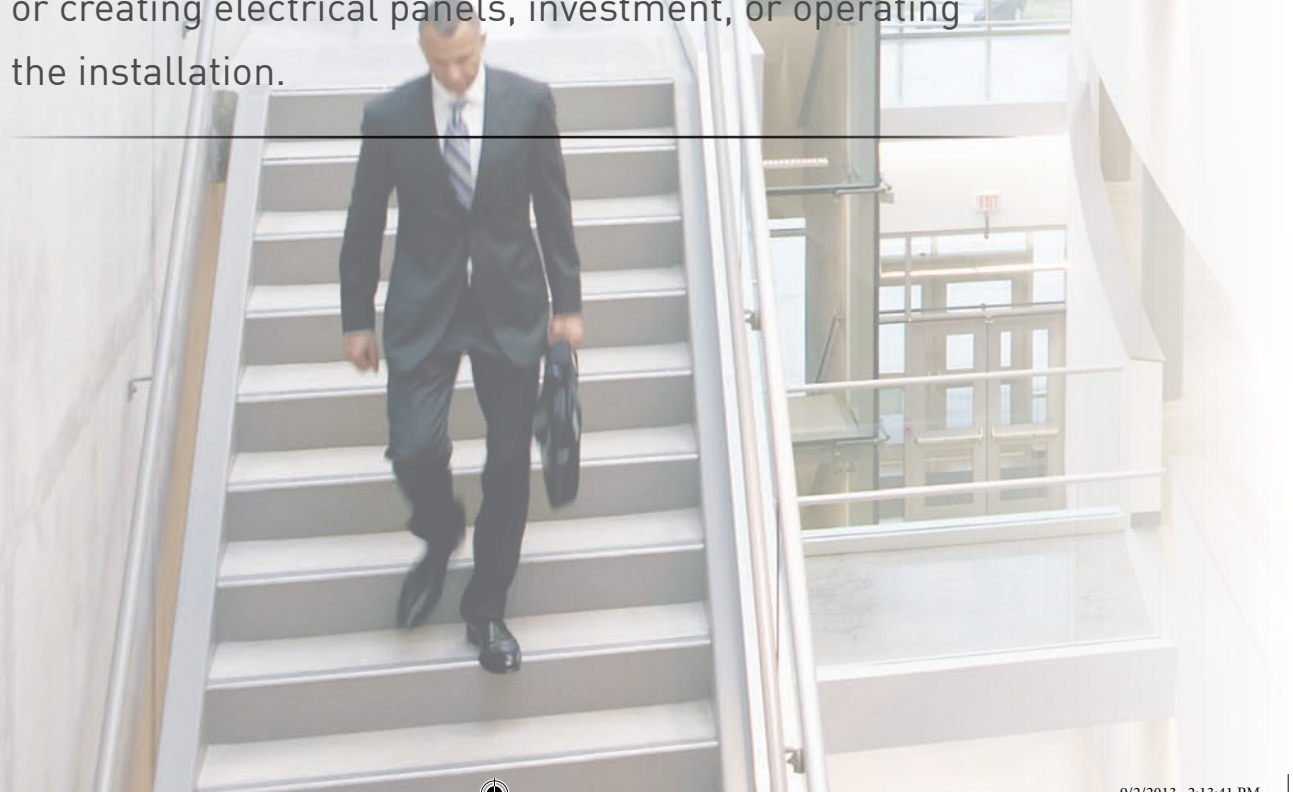



Pages 02-09

**WIDE CHOICE,
HIGH
PERFORMANCE
AND SAFETY**

02-03 | A complete range for all requirements from 16 to 1 600 A

04-05 | DPX³, an optimised range

06-07 | Reliable and precise protection

08-09 | Continuity of service

Pages 10-13

**NEW FUNCTIONS
SIMPLIFYING
THE USE**

10-11 | Easy operation and maintenance

12-13 | A complete range of accessories

Pages 14-23

**SIMPLE
AND QUICK
INSTALLATION**

14-15 | Installation of auxiliaries and connection

16-17 | Reliable and safe distribution system

18-19 | Perfect integration in XL³ enclosures

20-21 | The XL³ range: the answer to all your requirements

22-23 | Legrand services and commitments

Pages 24-71

CATALOGUE PAGES

24-31 | DPX³ 160 and DPX³ 250

32-33 | DPX³ 160 and DPX³ 250 accessories

34-45 | DPX 250, DPX 630 and DPX 1600

46-51 | XL³ accessories selection chart

52-71 | DPX³ and DPX technical characteristics





WIDE CHOICE, HIGH PERFORMANCE AND SAFETY

A COMPLETE RANGE FOR ALL YOUR REQUIREMENTS FROM 16 TO 1 600 A


DPX³/DPX: 5 sizes of moulded case circuit breakers

Breaking capacity ranging from 16 to 70 kA.



Easy identification of the breaking capacity: colour marking

DPX³ 160



DPX³ 250



MOUNTING		ON RAIL OR ON PLATE				ON RAIL OR ON PLATE			
Rated current I _n	Thermal magnetic release	From 16 to 160 A				From 100 to 250 A			
	Electronic release	-				From 40 to 250 A			
Breaking capacity I _{cu} ⁽¹⁾	380/415 V~	16 kA	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	70 kA
	220/240 V~	25 kA	35 kA	50 kA	65 kA	40 kA	60 kA	100 kA	100 kA
Standard breaking capacity I _{cs} [% I _{cu}]		100 %	100 %	100 %	100 %	100 %	100 %	100 %	100 %
Electronic earth leakage module		Without or integrated				Without or integrated			

[1] EN 60947-2 and IEC 60947-2



02 | 03


DPX 250



DPX 630



DPX 1250/1600

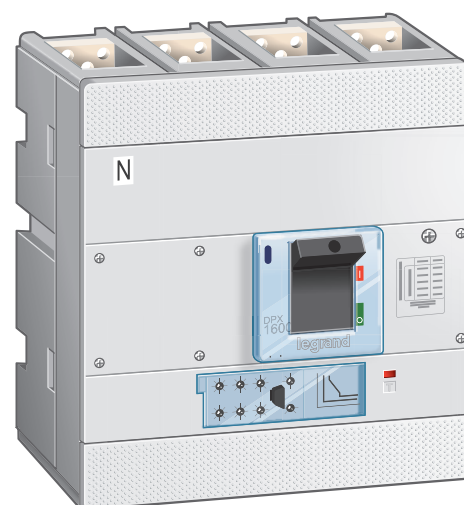

ON PLATE		ON PLATE		ON PLATE		ON PLATE	
From 40 to 250 A		From 320 to 630 A		From 800 to 1250 A		-	
From 40 to 250 A		From 250 to 630 A		-		From 800 to 1600 A	
36 kA	70 kA	36 kA	70 kA	36 kA	70 kA	50 kA	70 kA
60 kA	100 kA	60 kA	100 kA	80 kA	100 kA	80 kA	100 kA
100%	75%	100%	75%	100%	75%	100%	75%
Without or downstream		Without or downstream		Without or residual current relay and coils			






WIDE CHOICE, HIGH PERFORMANCE AND SAFETY


DPX³, AN OPTIMISED RANGE

The same depth for all circuit breakers from 16 to 250 A


With 2 new ratings (80 and 200 A), a wide range of versions, characteristics and innovative functions, Legrand has an even more comprehensive range with just two sizes of circuit breakers.



Thermal-magnetic DPX³ 160



Thermal-magnetic DPX³ 160
with residual current protection



Thermal-magnetic DPX³ 250



Thermal-magnetic DPX³ 250
with residual current protection


A complete range satisfying your requirements

		DPX ³ 160							DPX ³ 250					
Nominal current I _n (A)		16	25	40	63	80	100	125	160	40	100	160	200	250
Number of poles	3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Versions	Fixed	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Plug-in	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Release	Thermal-magnetic	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓
	Electronic									✓	✓	✓		✓
Options	Residual current protection	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Measurement									✓	✓	✓		✓
	Earth protection									✓	✓	✓		✓
Breaking capacity I _{cu} (kA)	16	✓	✓	✓	✓	✓	✓	✓	✓					
	25	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	36	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	70									✓	✓	✓	✓	✓






04 | 05




Electronic DPX³ 250



Electronic DPX³ 250
with residual current protection




Electronic DPX³ 250
with integrated measuring units



Electronic DPX³ 250
with residual current
protection and integrated
measuring units


Optimised dimensions

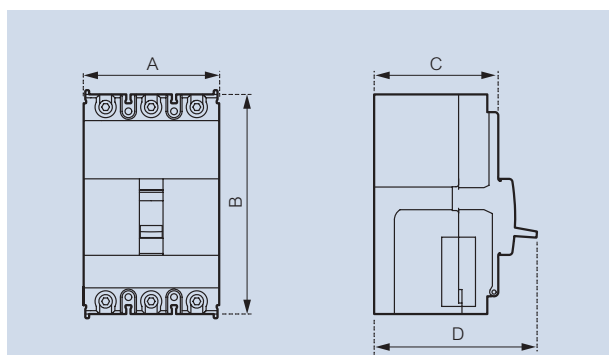


DIMENSIONS (mm)		DPX³ 160	DPX³ 250
A	3P	81	105
	4P	108	140
B	Without RCD	130	165
	With RCD	160	195
C		74	
D		100	

THE SAME DEPTH FOR ALL RATINGS

Optimised integration: devices with different ratings can be used together on the same row.

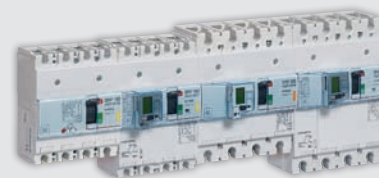

Interlocking of 2 MCCBs of different ratings.

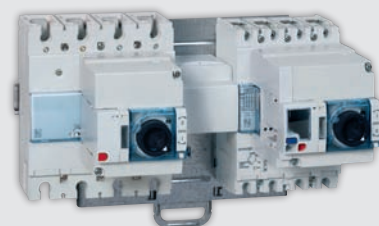

WIDE CHOICE, HIGH PERFORMANCE AND SAFETY

RELIABLE AND PRECISE PROTECTION



To comply with all requirements for the protection of people and property, the new DPX³ MCCBs and DPX³ RCBOs are available in thermal-magnetic versions from 16 to 250 A and electronic versions from 40 to 250 A.

Thermal-magnetic MCCBs DPX³ 160 and DPX³ 250

The thermal trip threshold I_r on all these devices can be adjusted to provide the best protection against overloads.

On the DPX³ 250 the magnetic trip threshold I_i can also be adjusted, for precise protection against short-circuits.

This threshold is fixed on the DPX³ 160.

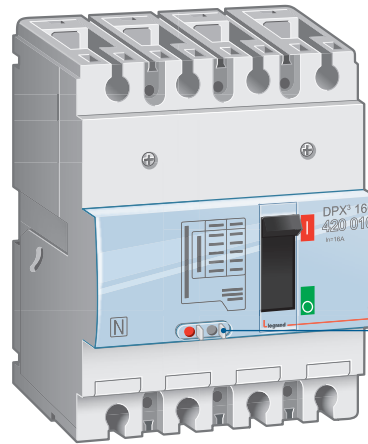

Thermal-magnetic MCCBs are adjusted on the front panel using a screwdriver

THERMAL-MAGNETIC RELEASES	DPX ³ 160	DPX ³ 250
Thermal protection against overloads I_r (A)	Adjustable: 0.8 to 1 x I_n	Adjustable: 0.8 to 1 x I_n
Magnetic protection against short circuits I_i (A)	Fixed 16 A: 400 A 25 A: 400 A 40 to 160A: 10 x I_n	Adjustable: 5 to 10 x I_n





legrand

06 | 07

Electronic MCCBs DPX³ 250


Electronic releases provide very precise adjustment of the trip thresholds I_r and I_{sd} and the response times T_r and T_{sd} .

On MCCBs with protection against earth faults I_g and T_g can be adjusted.

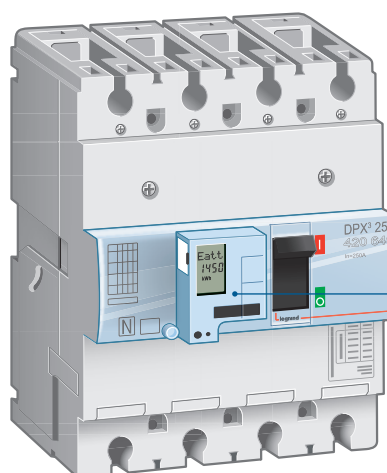

Adjustments are made using the selector switch and are displayed on the LCD screen

ELECTRONIC RELEASES		DPX ³ 250	
Long delay protection against overloads	Threshold I_r (A)	Adjustable	0.4 to $1 \times I_n$
	Response time T_r (s)		3 to 16 s
Short delay protection against short circuits	Threshold I_{sd} (A)	Adjustable	1.5 to $10 \times I_r$
	Response time T_{sd} (s)		0 to 0.5 s
Protection against earth faults	Threshold I_g (A)	Adjustable	0.2 to $7 \times I_n$
	Response time T_g (s)		0.1 to 1 s



RCBOs DPX³ 160 and DPX³ 250

Precise protection of people is provided on all RCDs (thermal-magnetic and electronic) by an integrated electronic unit. Adjustments are made via an LCD screen.

RESIDUAL CURRENT PROTECTION	DPX ³ 160/250
Trip threshold $I_{\Delta n}$ (A)	0.03 - 0.3 - 1 - 3
Response time Δt (s)	0 - 0.3 - 1 - 3

ADVANTAGES OF THE ELECTRONIC RELEASE:

- RS485 communication function
- Self-diagnostic function
- More precise adjustments
- Event log
- Optional measurement unit.






WIDE CHOICE, HIGH PERFORMANCE AND SAFETY

CONTINUITY OF SERVICE


Selectivity of DMX³, DPX³ and DPX MCCBs

Selectivity consists of coordinating the protection in such a way that a fault on one circuit only trips the protection placed directly upstream of the fault, thus avoiding the rest of the installation being put out of service.


Legrand circuit breakers are the ideal answer for total selectivity, providing 4 types of coordination: current sensing, time, dynamic and logical.

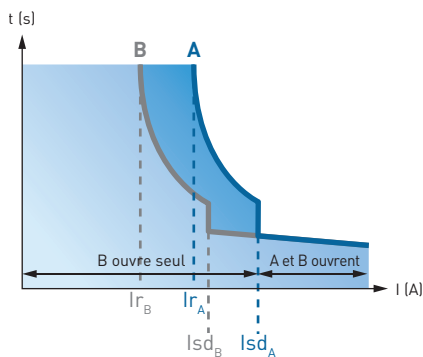


Current sensing selectivity
Choice of the correct rating to ensure selectivity

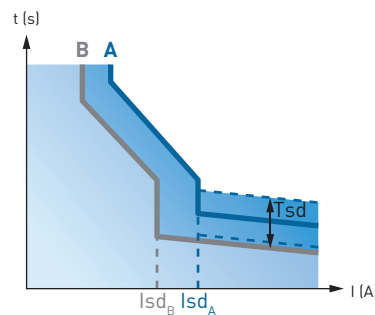

Time selectivity
Choice of the correct setting on a circuit breaker to space out the trips over time

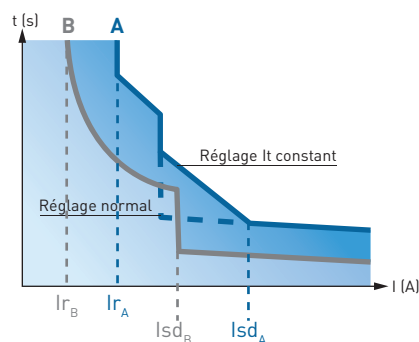

Dynamic selectivity
High and low electronic adjustment of the upstream and downstream circuit breakers

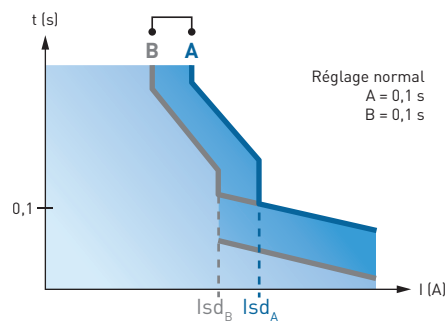

Logical selectivity
Communication between the circuit breakers to adjust the tripping to the actual operating requirements

For more information, please refer to Power Guide 05, "Breaking and protection devices"





legrand


08 | 09

DPX³ 160 and 250 supply invertors

Supply inversion switches the power supply of the installation to a backup supply when there is a fault on the main supply.

The DPX³ interlocking device greatly simplifies installing the supply inverter:


- Front mounting
- Compact size
- No adjustments required
- Ability to use a DPX³ 160 and a DPX³ 250 together
- Fixed version rail mounted, enabling installation in small cabinets
- Just 2 catalogue numbers covering all DPX³, whatever the size: one for fixed versions, one for plug-in versions.

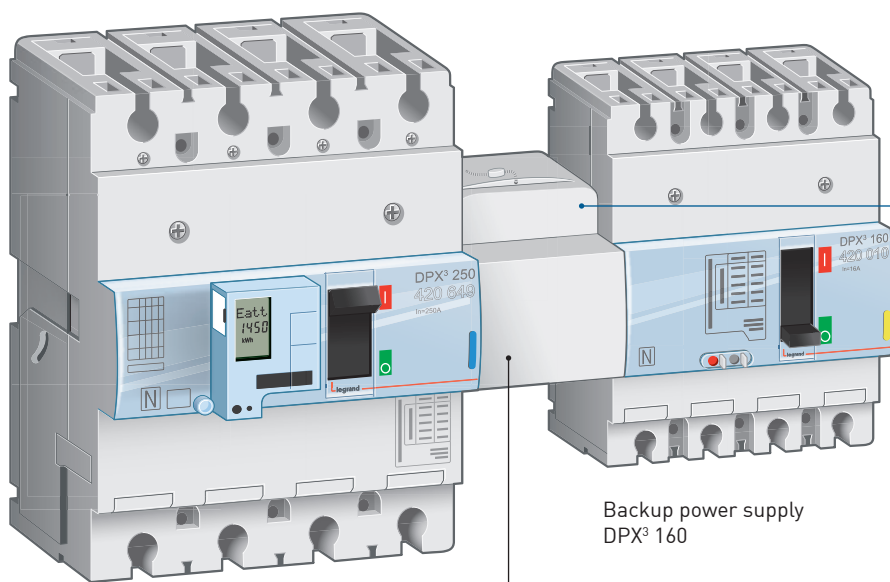

Normal use
DPX³ 250

Interlocking for supply
inversion


Backup power supply
DPX³ 160



Easy to install:
mounting on front panel
with no adjustment

MOTORIZED SUPPLY INVERSION FOR CONTINUOUS OPERATION

Combined with an automated control unit, supply inversion can be controlled locally or even remotely by supervision.

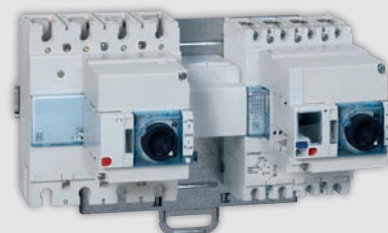

NEW FUNCTIONS SIMPLIFYING THE USE


EASY OPERATION AND MAINTENANCE

Integrated measuring units on electronic DPX³ 250

The new DPX³ 250 electronic MCCBs with integrated measurement functions provide access to the parameters of the installation in a compact unit.

The measured values can be viewed:

- Directly on the electrical panel, on the LCD screen on the front panel of the device
- Remotely using a PC or a smartphone equipped with supervision software, via the RS485 communication interface and the Modbus protocol.

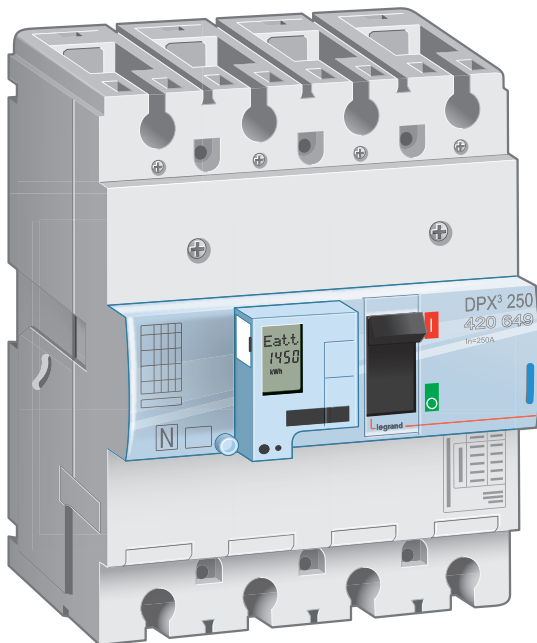


Display of values in real time and logs:

- Consumption
- Current
- Voltage
- Active/reactive power
- Harmonics
- Frequency

DISPLAY, MEASURE, CONTROL

Display of measured values on a PC equipped with supervision software.

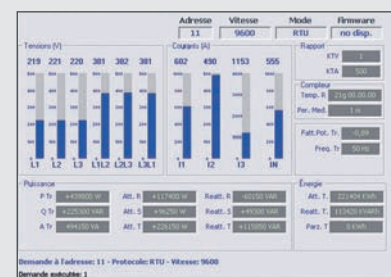



Plug-in DPX³ 160 and DPX³ 250


Replacing a plug-in device only takes a few minutes and can be done without switching off the power supply to the other circuits.

All the devices in the DPX³ range can be converted to plug-in versions. The bases are supplied with all the necessary components to convert the devices. They are mounted on plates and can be connected via front or rear terminals.

Specific accessories are available as options to ensure the safety of testing and maintenance operations.



With the optional connector the power can be disconnected while the auxiliaries are kept operational for tests

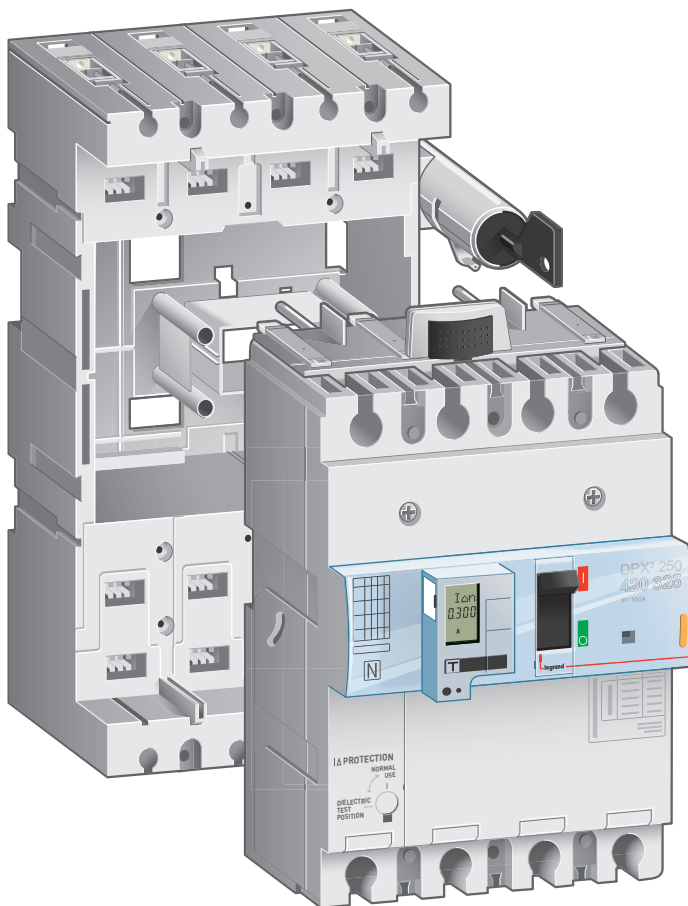

The top and bottom handles enable the device to be extracted easily



Locking via key or padlock prevents the device being switched on, on its base, during maintenance operations






NEW FUNCTIONS SIMPLIFYING THE USE

A COMPLETE RANGE OF ACCESSORIES

Motorised control for DPX³ 160 and 250

Motorised controls for the DPX³ 160 and 250 enable devices to be tripped and reset remotely to provide a simple answer to operating requirements.

They are available in just **2 catalogue numbers** for all the DPX³, one with a **side** control and one with a **front** control. They take a wide range of DC and AC supply voltages.

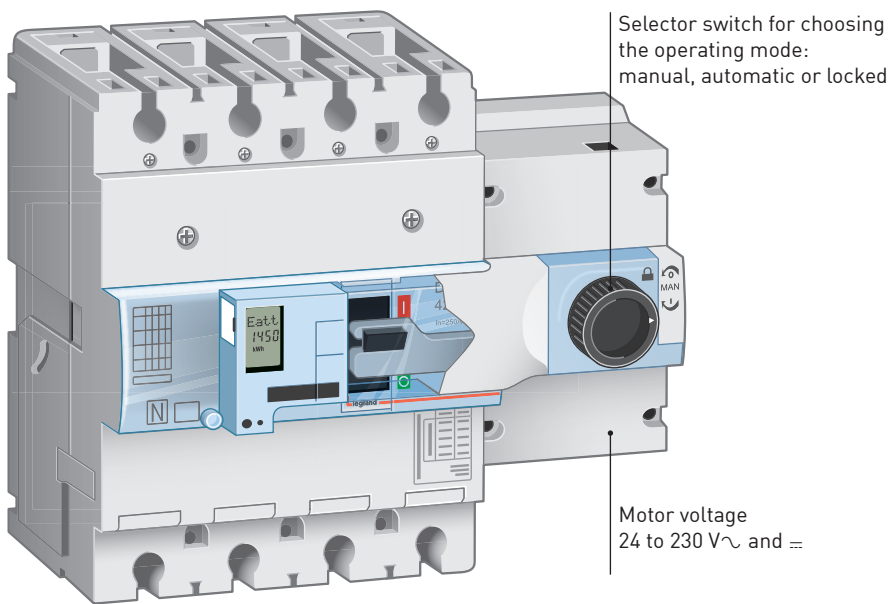

The operating key is always available for periodic tests or for manual control




The front motorised control leaves access to the connections and adjustment



The side motorised control is mounted on the rail beside the DPX³

REMOTE TRIPPING FOR SIMPLIFIED OPERATION:

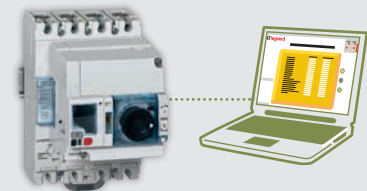


Remote control from a PC equipped with supervision software for load shedding and restoration.



Rotary controls for DPX³ 160 and 250

Direct or remote rotary controls provide **the utmost convenience**.

They can be **locked using padlocks or keys** to ensure the safety of maintenance operations.

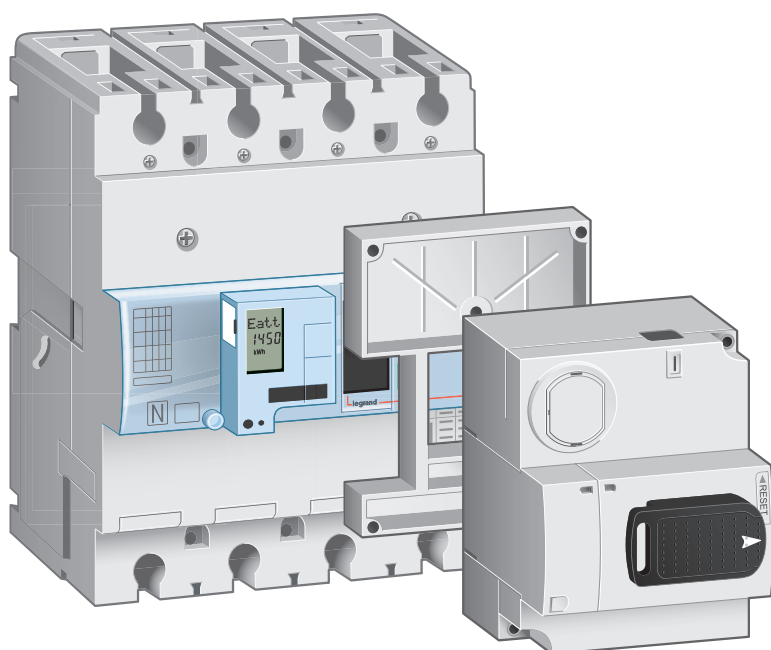

Rotary controls
can take a lock with key



The remote rotary control
enables the control handle to be
installed on the door

REMINDER:

The DPX 250, 600 and 1600 keep their own specific accessories: motorised, rotary and remote controls.



SIMPLE AND QUICK INSTALLATION

INSTALLATION OF AUXILIARIES AND CONNECTION


Control and signalling auxiliaries for DPX³ 160 and 250

The trip coils enable the opening of the circuit breaker to be controlled via a control circuit (emergency break, electronic control box, remote control).

Auxiliary and fault signal contacts are used to control an auxiliary circuit or to feed back the status of the circuit breaker remotely.




The electrical auxiliaries are installed in dedicated locations under the front panel

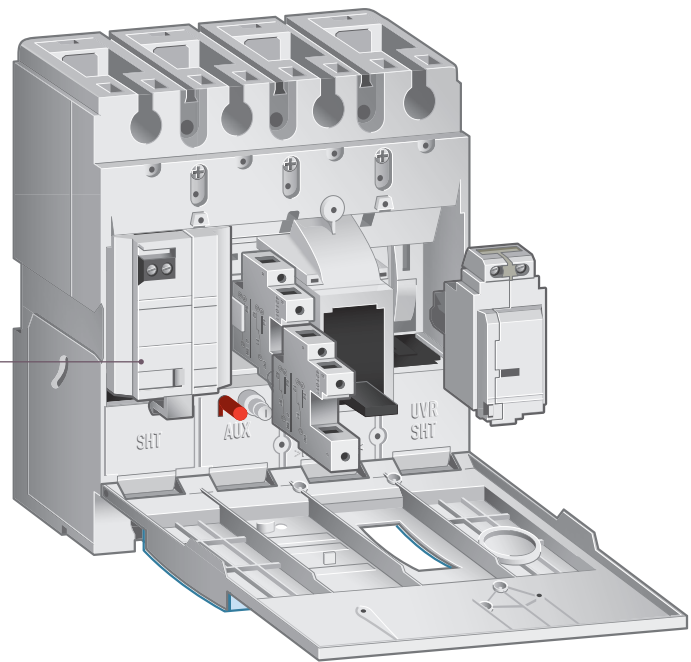

DPX³ have three options for the outgoing connection wires: via the front panel,




...via the side,



...or via the back

AUXILIARIES COMMON TO THE DPX³ 160 AND 250:




- Auxiliary or fault signal contact
- Current shunt trips
- Undervoltage releases




Connecting DPX³ 160 and 250

DPX³ 160 have cage terminals as standard for direct connection via cable or bars.
DPX³ 250 are supplied with plain connection plates for connection via bars or lugs.
They can have cage terminals as an option.

A complete range of connection accessories is also available for all installation configurations.

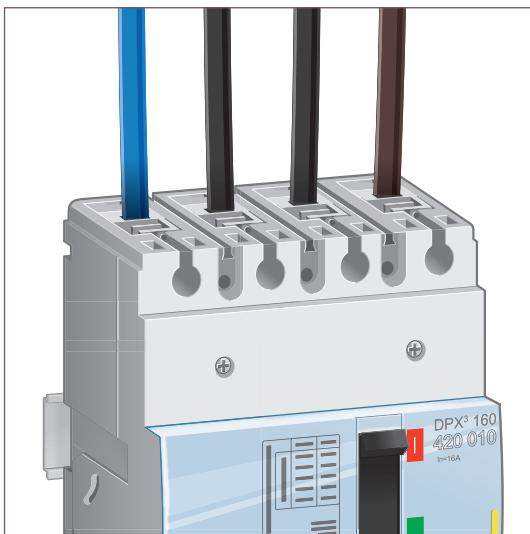

Connecting a DPX³ 160
via cables on integrated cage terminals

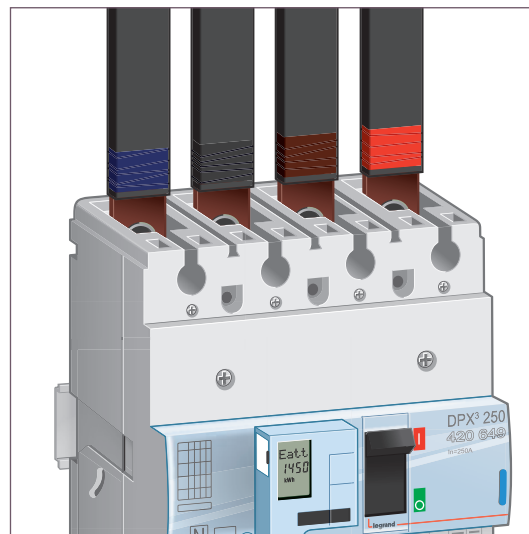

Connecting a DPX³
via flexible bars screwed onto plates



The spreaders enable
connection via large
cross-section cables



The flat rear terminals
are adjustable



The terminal shields provide
IP 2X protection
for the connections

LARGE CAPACITY CAGE TERMINALS

Large capacity cage terminals enable connection via cable up to 150 mm² (see catalogue pages for more details)





SIMPLE AND QUICK INSTALLATION

RELIABLE AND SAFE DISTRIBUTION SYSTEM


The HX³/VX³ optimised distribution system

Optimised distribution is a complete, coherent system for distributing electricity in the panel:

- Optimised busbars (C-section copper and zinc plated aluminium)
- Prefabricated links for connecting devices to the busbars
- Horizontal distribution blocks with automatic connection of devices (can be connected while energised)


All these components, which have been tested with Legrand devices, can be used to create safe, easy to maintain panels that comply with standard IEC 61439, cut down installation time and optimise the size of enclosures.

VX³ vertical optimised distribution




C-section busbars and power supply kit


HX³ horizontal optimised distribution



250 and 400 A row distribution block for DPX³ and modular devices



125 A row distribution block for modular devices

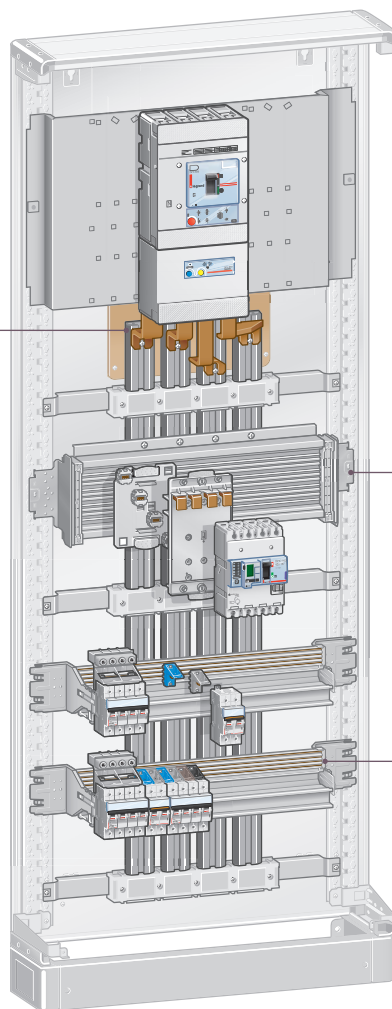


Optimised distribution in XL³ 400 - 800 enclosure






16 | 17

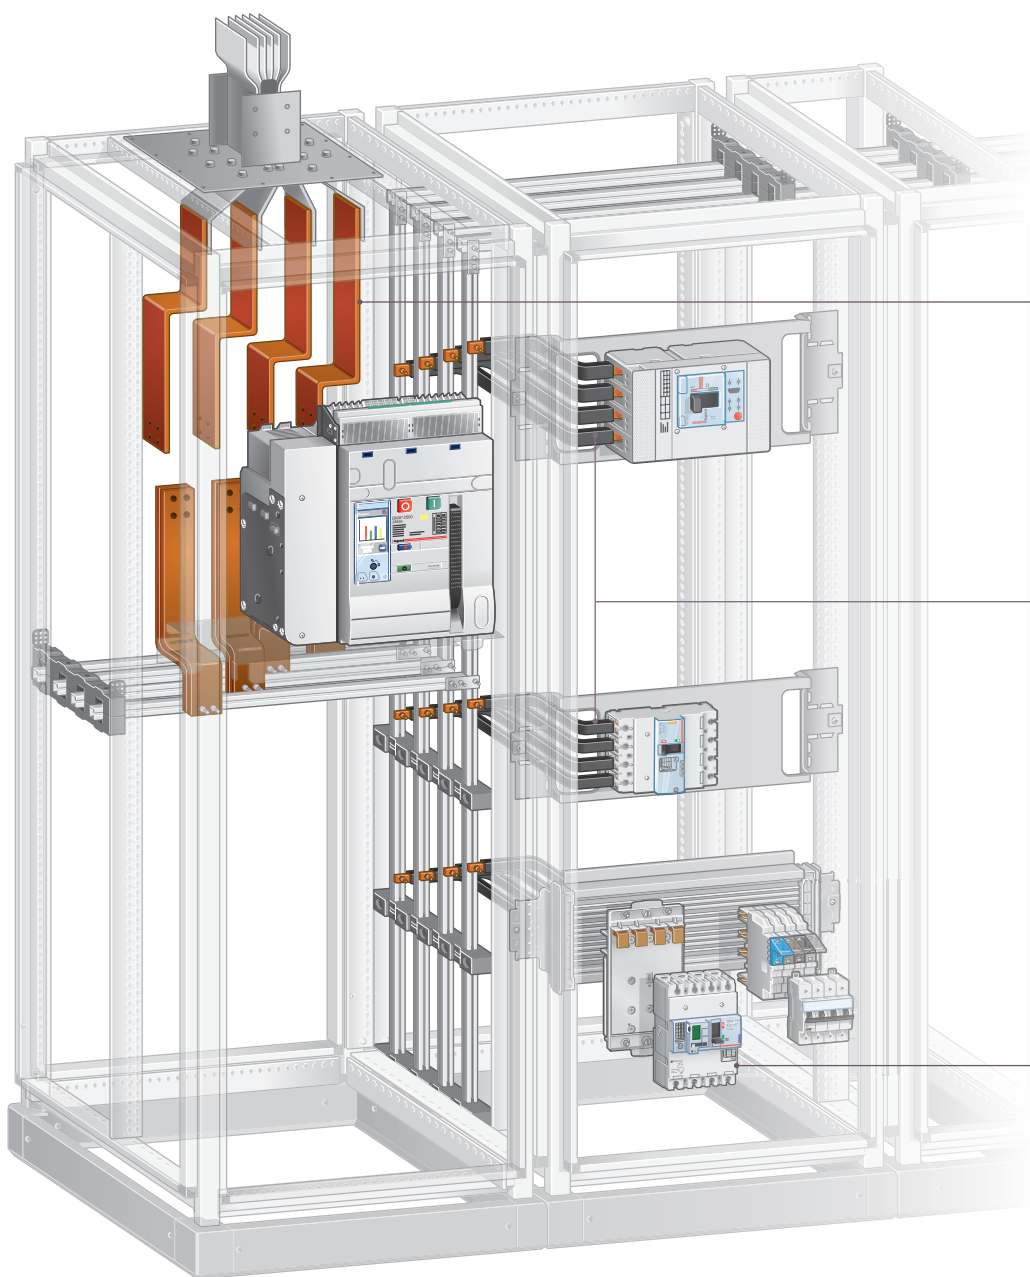


Optimised distribution in XL³ 4000 enclosure

VX³ vertical optimised distribution




DMX³ connection kit



DPX³ and DPX connection kits

HX³ horizontal optimised distribution



DPX³ and modular devices together on the same row






SIMPLE AND QUICK INSTALLATION

PERFECT INTEGRATION IN XL³ ENCLOSURES

Mounting on a rail and on a plate-rail


All fixed version DPX³ with front terminals can be mounted on a rail or on a plate-rail using an adaptor. Mounting on a rail enables DPX³ 160 to be installed in XL³ 125 or XL³ 160 cabinets. Mounting on a plate-rail provides extra strength to withstand mechanical stresses while maintaining the possibility of mounting DPX³ 160 and 250 and modular devices together on the same row.

Examples of mounting in an XL³ 160 cabinet

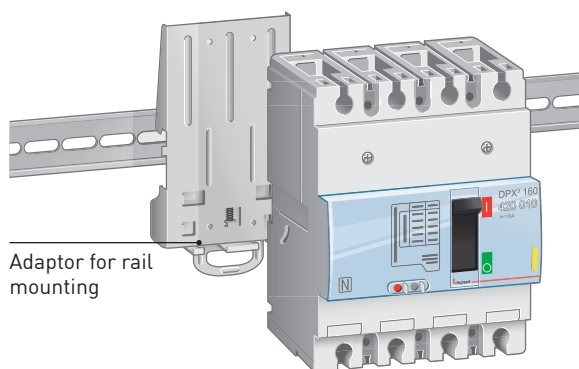


Adaptor for rail mounting

Mounting a DPX³ 160 on a rail

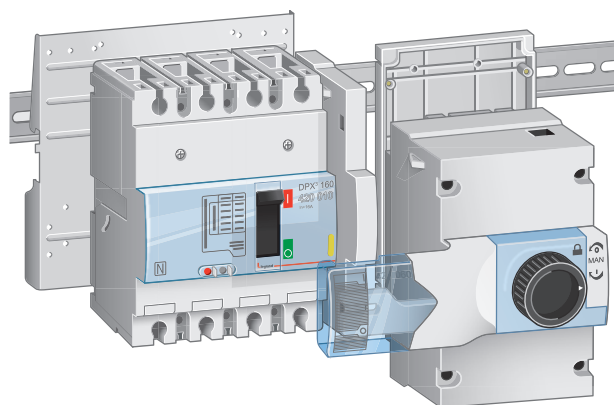


Mounting a DPX³ 160 with side motorised control on a rail

Examples of mounting in XL³ 400/800/4000 enclosures

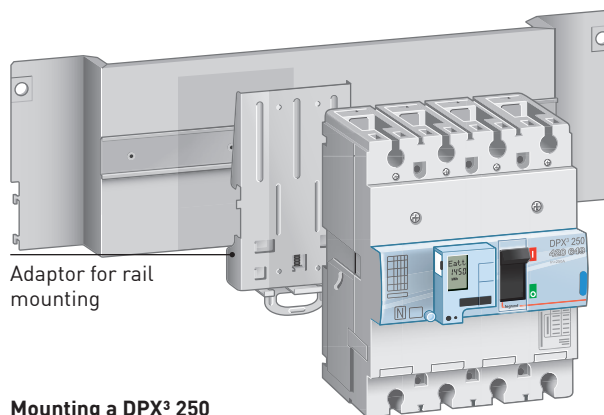

Adaptor for rail mounting

Mounting a DPX³ 250 on a plate-rail

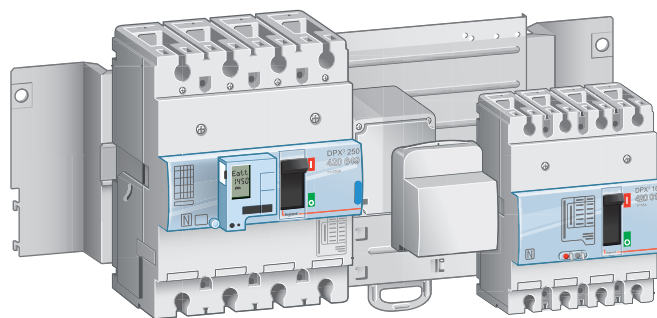

Mounting two DPX³ on a rail as supply invertors

□ To select XL³ fixing equipment, please refer to the tables on pages 46 to 51 or use XL Pro³ (see page 22)






18 | 19


Mounting on a plate

There are dedicated plates for mounting DPX³ 160 and 250 in XL³ enclosures:

- Horizontally
- Plug-in version
- Connected via rear terminals
- With front rotary or motorised control

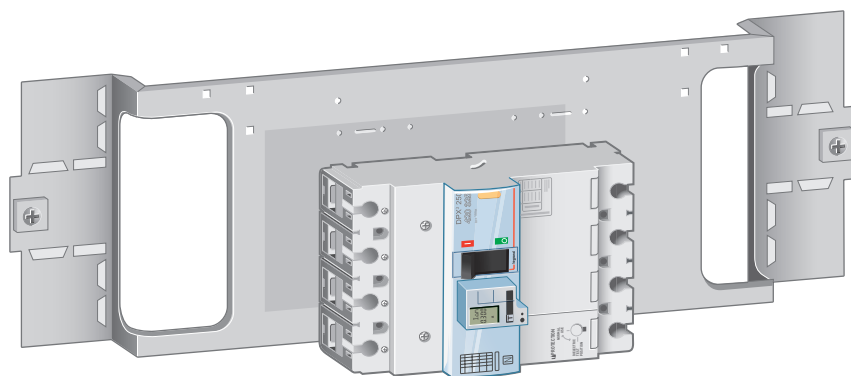

Mounting a DPX³ horizontally on a plate

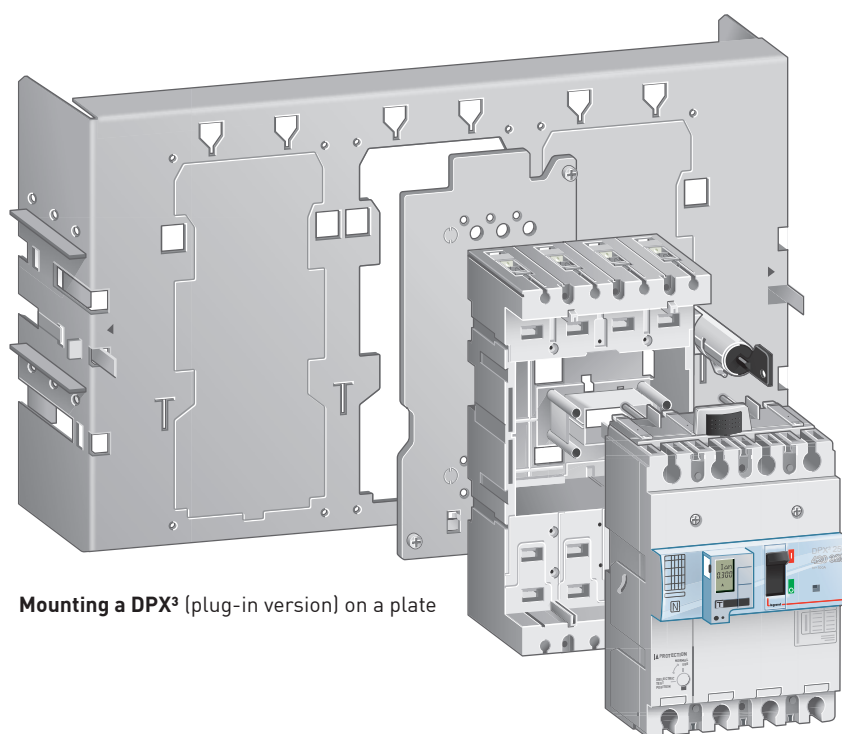

Mounting a DPX³ (plug-in version) on a plate





SIMPLE AND QUICK INSTALLATION

THE XL³ RANGE: THE ANSWER TO ALL YOUR REQUIREMENTS

Distribution panels from 125 to 4 000 A

From the XL³ 125 cabinet to the XL³ 4000 enclosure, the Legrand range meets all your quality standards: the strength and stylish design of XL³ panels ensure perfect, long-lasting integration.

The XL³ range features numerous practical innovations for quick, safe assembly, real freedom of configuration and considerable time-saving during maintenance and extension operations.

4 000 A

800 A

400 A

160 A

125 A



XL³ 4000 modular enclosures



XL³ 800 extendable cabinets and enclosures




XL³ 400 extendable cabinets and enclosures



XL³ 160 ready-to-use cabinets



XL³ 125 cabinets easy to install



XL³ 4000
Tapped holes for fixing functional uprights



XL³ 4000/800/400
Ergonomic or locking handle, solid or glazed doors



XL³ 800
Faster access and work with faceplates on hinges



XL³ 4000/800/400/160
1/4 turn faceplates with handle






20 | 21

The XL³ 125 cabinets

Optimised wiring for maximum ease of installation and time-saving. The faceplate can be removed one row at a time, or the whole cover can be taken off, depending on the extent of the work to be carried out inside the cabinet: wiring or maintenance.



A complete solution for small businesses and power service sector sites



XL³ 160
When the frame and side panels are completely removed, there is full access for wiring



Tool-free removable rail
Rails can be removed individually in a single movement, and without any tools, for easier cable routing



Cable connection is easy
Simply tilt the chassis up or down according to the direction of cable entry



Plug-in earth terminal block
Tool-free removal of the earth terminal block for easier cable routing



Removable cable entry plate
The cable entry plate can be removed without using any tools, to allow direct cable entry



THE TOOLS TO SIMPLIFY YOUR WORK

LEGRAND SERVICES AND COMMITMENTS

XL PRO³ and XL PRO³ Calcul software

The XL PRO³ software is an upgraded version of your distribution panel design software: **revised interface, new DPX³ and DX³ ranges incorporated, HX³ and VX³ distribution accessible with a single click**, etc.

And it still includes all your functions:

- Guided selection of products and accessories
- Display of the enclosure and the component layout
- Automatic creation of the folder for costing and ordering

XL PRO³ Calcul interfaces with XL PRO³.


It enables you to create single-line diagrams, carry out design calculations, work out the power analysis, and calculate the necessary protective devices with their settings.

To order the software, please contact your Legrand sales office.




XL PRO³ EVEN MORE POWERFUL AND CLOSER TO YOUR REQUIREMENTS


The new offer included in the databases

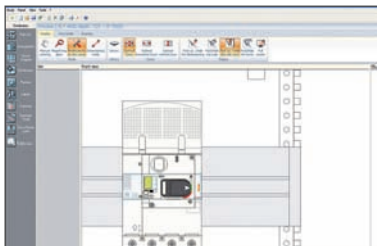

HX³ and VX³ distribution managed directly in the layout and circuit diagrams and the parts list

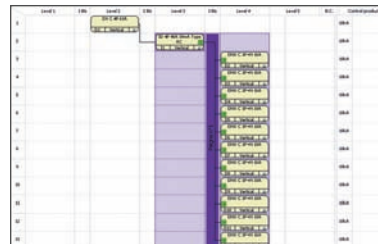

A re-designed interface for more intuitive use

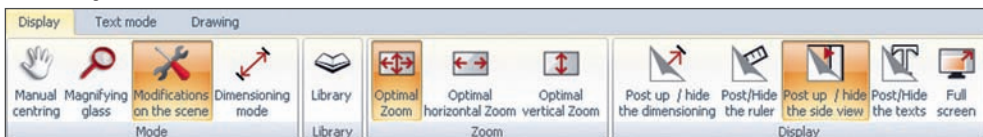



Environmental commitment

The Legrand Group prioritises materials and processes that respect people and the environment both on its industrial sites and in the design of its products. Through this approach, the Group reduces the impact of its activities while strengthening its economic performance and the appeal of its offers.

THE PEP: A RECOGNISED, RELIABLE TOOL

The PEP is tool that is used by the whole profession. It gives a clear, accurate message. The type of sheet shown below is the result of an overall process in the electrical industries. It is based on standard ISO/TR 14025:





- Environmental labels and declarations
- Type III environmental declarations

It uses a recognised methodology and tools:









- Life cycle assessment (based on standard ISO 14040)
- EIME software (Environmental Information & Management Explorer).



The PEP, an eco-declaration which is available as a printed document









DPX³/DPX™ electrical characteristics

																
DEVICES	DPX ³ 160 thermal magnetic (p. 26-27)				DPX ³ 250 thermal magnetic (p. 28)				DPX ³ 250 electronic release (p. 29)							
Mounting	On rail  or on plate				On rail  or on plate				On rail  or on plate							
Breaking capacity (kA) (EN 60947-2 and IEC 60947-2)	16 kA	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	70 kA	25 kA	36 kA	50 kA	70 kA				
380/415 V~	16	25	36	50	25	36	50	70	25	36	50	70				
220/240 V~	25	35	50	65	40	60	100	100	40	60	100	100				
Breaking capacity (% Icu)	100	100	100	100	100	100	100	100	100	100	100	100				
Characteristic of use																
Nominal frequency	50/60 Hz															
Maximum rated operating voltage Ue	690 V (500 V with integrated e.l.c.bs)				690 V (500 V with integrated e.l.c.bs)				690 V (500 V with integrated e.l.c.bs)							
Category of use	A				A				A							
Thermal magnetic adjustment																
	Thermal	0,8 to 1 I _n				0,8 to 1 I _n				-						
	Magnetic	10 I _n (400 A for 16 A and 25 A sizes)				5 to 10 I _n				-						
Electronic protection adjustment																
									I _r : 0,4 to 1 I _n I _{sd} : 1,5 to 10 I _r							
Maximum cable cross-section																
Rigid cable	120 mm ²				185 mm ²				185 mm ²							
Flexible cable	95 mm ²				150 mm ²				150 mm ²							
Copper bar and lug width	18 mm				25 mm ⁽¹⁾				25 mm ⁽¹⁾							
Tightening torque	8 Nm				10 Nm				10 Nm							
Nominal current (I _n) at 40 °C (A)																
I _n (A)	16	25	40	63	80	100	125	160	100	160	200	250	40	100	160	250
Phase	16	25	40	63	80	100	125	160	100	160	200	250	40	100	160	250
N	16	25	40	63	80	100	125	160	100	160	200	250	40	100	160	250
N/2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Magnetic threshold (I _m) (A) ⁽²⁾ of DPX thermal magnetic	Fixed				Adjustable											
I _n (A)	16	25	40	63	80	100	125	160	100	160	200	250	-			
Phase	400	400	400	630	800	1000	1250	1600	125-250	200-400	315-630	500-1000	-			
N	400	400	400	630	800	1000	1250	1600	125-250	200-400	315-630	500-1000	-			
N/2	-	-	-	-	-	-	-	-	-	-	-	-	-			
Endurance (cycles)																
Electrical	8000				8000				8000							
Mechanical	25000				20000				20000							
Electronic earth leakage module																
Type	without or integrated				without or integrated				without or integrated							

(1) Copper bars only
(2) Trip current for 50/60 Hz. For direct current, multiply by 1.5



																									
DPX 250 thermal magnetic (p. 34-36)		DPX 250 electronic release (p. 34-36)		DPX 630 thermal magnetic (p. 37-39)		DPX 630 electronic release (p. 37-39)		DPX 1250 thermal magnetic (p. 40)		DPX 1600 electronic release (p. 40)															
On plate		On plate		On plate		On plate		On plate		On plate															
36 kA	70 kA ⁽³⁾	36 kA	70 kA ⁽³⁾	36 kA	70 kA ⁽³⁾	36 kA	70 kA ⁽³⁾	36 kA	70 kA ⁽³⁾	50 kA	70 kA ⁽³⁾	50 kA	70 kA ⁽¹⁾⁽³⁾												
36	70	36	70	36	70	36	70	36	70	50	70	50	70												
60	100	60	100	60	100	60	100	60	100	80	100	80	100												
100	75	100	75	100	75	100	75	100	75	100	75	100	75												
50/60 Hz																									
690 V~ - 250 V=		690 V~		690 V~ - 250 V=		690 V~		690 V~		690 V~		690 V~													
A		A		A		A B: In 200 to 400 A		A		A		B													
0.64 to 1 In		-		0.8 to 1 In		-		0.8 to 1 In		-		-													
3.5 to 10 In		-		5 to 10 In		-		5 to 10 In		-		-													
-		I _r : 0.4 to 1 In Tr: 5 to 30 s I _{sd} : 1.5 to 10 Ir Tsd: 0 to 0.3 s I ² t = K Tsd: 0.01 to 0.3 s		-		I _r : 0.4 to 1 In Tr: 5 to 30 s I _{sd} : 1.5 to 10 Ir Tsd: 0 to 0.3 s I ² t = K Tsd: 0.01 to 0.3 s		-		I _r : 0.4 to 1 In Tr: 5 to 30 s I _{sd} : 1.5 to 10 Ir Tsd: 0 to 0.3 s I ² t = K Tsd: 0.01 to 0.3 s		-													
185 mm ²		185 mm ²		300 mm ² or 2 x 240 mm ²		300 mm ² or 2 x 240 mm ²		2 or 4 x 240 mm ²		2 or 4 x 240 mm ²		2 or 4 x 240 mm ²													
150 mm ²		150 mm ²		240 mm ² or 2 x 185 mm ²		240 mm ² or 2 x 185 mm ²		2 or 4 x 185 mm ²		2 or 4 x 185 mm ²		2 or 4 x 185 mm ²													
25 mm		25 mm		32 mm		32 mm		50 mm		50 mm		50 mm													
15 Nm		15 Nm		15 Nm				20 Nm																	
40	63	100	160	250	40	100	160	250	250	320	400	500	630	250	400	630	630	800	1000	1250	630	800	1250	1600	
40	63	100	160	250	40	100	160	250	250	320	400	500	630	250	400	630	630	800	1000	1250	630	800	1250	1600	
40	63	100	160	250	0 - 50 - 100 % of phase value				250	320	400	500	630	0 - 50 - 100 % of phase value				630	800	1000	1250	0 - 50 - 100 % of phase value			
-	-	-	100	160					-	250	250	250	320												
Adjustable																									
40	63	100	160	250	-				250	320	400	500	630	-				800	1000	1250	-				
140 - 400	220 - 630	350 - 1000	560 - 1600	900 - 2500	-				1250 - 2500	1600 - 3200	2000 - 4000	2500 - 5000	3150 - 6300	-				4000 - 8000	5000 - 10000	6250 - 12500	-				
140 - 400	220 - 630	350 - 1000	560 - 1600	900 - 2500	-				1250 - 2500	1600 - 3200	2000 - 4000	2500 - 5000	3150 - 6300	-				4000 - 8000	5000 - 10000	6250 - 12500	-				
-	-	-	350 - 1000	560 - 1600	-				800 - 1600	1000 - 2000	1250 - 2500	1600 - 2000	2000 - 4000	-											
8000		8000		5000		5000		3000		2000															
20000		20000		15000		15000		10000		10000															
downstream e.l.c.bs.		downstream e.l.c.bs.		downstream e.l.c.bs.		downstream e.l.c.bs.		-		-															



DPX³ 160 thermal magnetic MCCBs from 16 to 160 A



Technical characteristics and tripping curves (p. 60-62)
Dimensions (p. 54)

Can be mounted on rail or on plate in XL³ cabinets and enclosures
MCCBs for switching, control isolation and protection of low voltage electrical lines
Supplied with cage terminals 70 mm² max. (flexible cable) or 95 mm² max. rigid cable with accessories
Can be fitted with accessories and DPX³ common auxiliaires (p. 32)
Conform to IEC 60947-2

Pack	Cat.Nos		MCCBs - fixed version
			Thermal adjustable from 0,8 to 1 In Magnetic fixed at 10 In (fixed at 400 A for In 16 A and 25 A)
			Breaking capacity Icu 16 kA (400 V~)
	3P	4P	In (A)
1	420 000	420 010	16
1	420 001	420 011	25
1	420 002	420 012	40
1	420 003	420 013	63
1	420 004	420 014	80
1	420 005	420 015	100
1	420 006	420 016	125
1	420 007	420 017	160
			Breaking capacity Icu 25 kA (400 V~)
1	420 040	420 050	16
1	420 041	420 051	25
1	420 042	420 052	40
1	420 043	420 053	63
1	420 044	420 054	80
1	420 045	420 055	100
1	420 046	420 056	125
1	420 047	420 057	160
			Breaking capacity Icu 36 kA (400 V~)
1	420 080	420 090	16
1	420 081	420 091	25
1	420 082	420 092	40
1	420 083	420 093	63
1	420 084	420 094	80
1	420 085	420 095	100
1	420 086	420 096	125
1	420 087	420 097	160
			Breaking capacity Icu 50 kA (400 V~)
1	420 120	420 130	16
1	420 121	420 131	25
1	420 122	420 132	40
1	420 123	420 133	63
1	420 124	420 134	80
1	420 125	420 135	100
1	420 126	420 136	125
1	420 127	420 137	160

Pack	Cat.Nos	MCCBs with electronic earth leakage module - fixed version
		Thermal adjustable from 0,8 to 1 In Magnetic fixed at 10 In (fixed at 400 A for In 16 A and 25 A)
		Equipped with earth leakage module with LCD screen Adjustable sensitivity: 0.03 - 0.3 - 1 - 3 A Adjustable tripping: 0 - 0.3 - 1 - 3s (with 0.03 A possible only 0s)
		Breaking capacity Icu 16 kA (400 V~)
	4P	In (A)
1	420 030	16
1	420 031	25
1	420 032	40
1	420 033	63
1	420 034	80
1	420 035	100
1	420 036	125
1	420 037	160
		Breaking capacity Icu 25 kA (400 V~)
1	420 070	16
1	420 071	25
1	420 072	40
1	420 073	63
1	420 074	80
1	420 075	100
1	420 076	125
1	420 077	160
		Breaking capacity Icu 36 kA (400 V~)
1	420 110	16
1	420 111	25
1	420 112	40
1	420 113	63
1	420 114	80
1	420 115	100
1	420 116	125
1	420 117	160
		Breaking capacity Icu 50 kA (400 V~)
1	420 150	16
1	420 151	25
1	420 152	40
1	420 153	63
1	420 154	80
1	420 155	100
1	420 156	125
1	420 157	160

Red catalogue numbers: New products



DPX³ 160 equipment and mounting accessories



421 040



421 036



Pack	Cat.Nos	Equipment for plug-in version
1	421 040	A plug-in version DPX ³ is a fixed version DPX ³ mounted on a plug-in base
1	421 041	Plug-in bases for DPX ³ 160
		Front or rear terminal mounting base
		For DPX ³ 160 - 3P
		For DPX ³ 160 - 4P with or without earth leakage module
1	421 044	Connectors for auxiliary contacts
		Set of connectors
1	421 045	Padlocks for plug-in base
1	421 046	Ronis locking accessory
1	421 047	Profalux locking accessory
		Padlock accessory
Connection accessories		
		Cage terminals
		For Cu/Al cables, 1 x 95 mm ² for flexible cables and 1 x 120 mm ² for rigid cable and bars or lugs 18 mm
1	421 026	Set of 3 terminals
1	421 027	Set of 4 terminals
		Insulated shields
1	421 070	Set of 3 insulated shields
		Extended front terminals
		For copper bars
1	421 028	Set of 3 terminals
1	421 029	Set of 4 terminals
		Spreaders
		For incoming bars or cable lugs
1	421 032	Set of 3 spreaders for DPX ³ 160 3P
1	421 033	Set of 4 spreaders for DPX ³ 160 4P
		Rear terminals
		Flat swivel terminals
		Used to convert a fixed version with front terminals to a fixed version with rear terminals
1	421 036	Set of 3 rear terminals for DPX ³ 160 3P
1	421 037	Set of 4 rear terminals for DPX ³ 160 4P
Sealable terminal shields		
		For front terminals
1	421 054	For DPX ³ 160 3P
1	421 055	For DPX ³ 160 3P
		For rear terminals
1	421 050	For DPX ³ 160 3P
1	421 051	For DPX ³ 160 4P
Fixing plates		
		For fixing DPX ³ 160 on rail or on plate
1	421 071	For DPX ³ 160 3P/4P without earth leakage module
1	421 073	For DPX ³ 160 4P with earth leakage module
		421 068 For DPX ³ 160 3P/4P with side mounting motor operator

XL³ mounting accessories (p. 46-53)
Accessories (p. 32)


DPX³ 160 connection

□ Connection


Direct connection

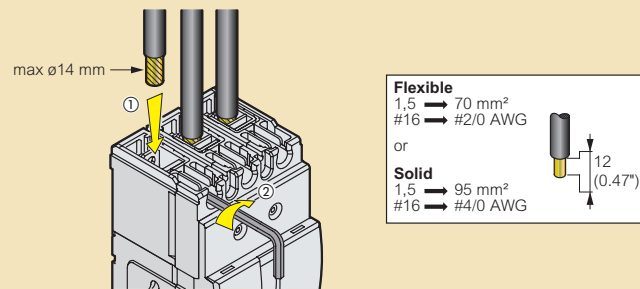


Spreaders



Sealable terminal shield

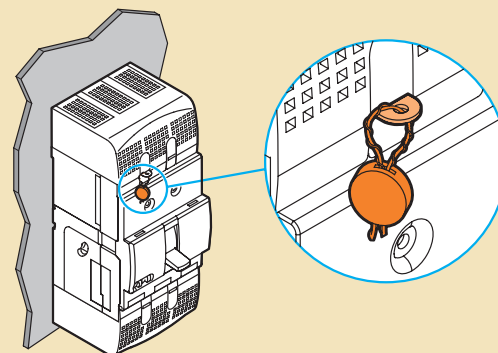

Rear terminals



Red catalogue numbers: New products

DPX³ 250 thermal magnetic

MCCBs from 100 to 250 A



420 205

420 225

Technical characteristics and tripping curves (p. 60-62)
Dimensions (p. 55)

Can be mounted on rail or on plate in XL³ cabinets and enclosures
MCCBs for switching, control isolation and protection of low voltage electrical lines
Supplied with insulated shileds, screw terminals 120 mm² max. (flexible cable) or 150 mm² max. rigid cable with accessories
Can be fitted with accessories and DPX³ common auxiliaires (p. 32)
Conform to IEC 60947-2

Pack	Cat.Nos		MCCBs - fixed version
			Thermal adjustable from 0,8 to 1 In Magnetic adjustable from 5 to 10 In Breaking capacity Icu 25 kA (400 V \sim)
	3P	4P	In (A)
1	420 205	420 215	100
1	420 207	420 217	160
1	420 208	420 218	200
1	420 209	420 219	250
			Breaking capacity Icu 36 kA (400 V \sim)
1	420 235	420 245	100
1	420 237	420 247	160
1	420 238	420 248	200
1	420 239	420 249	250
			Breaking capacity Icu 50 kA (400 V \sim)
1	420 265	420 275	100
1	420 267	420 277	160
1	420 268	420 278	200
1	420 269	420 279	250
			Breaking capacity Icu 70 kA (400 V \sim)
1	420 605	420 615	100
1	420 607	420 617	160
1	420 608	420 618	200
1	420 609	420 619	250

Pack	Cat.Nos	MCCBs with electronic earth leakage module - fixed version
		Thermal adjustable from 0,8 to 1 In Magnetic adjustable from 5 to 10 In Equipped with earth leakage module with LCD screen Adjustable sensitivity: 0.03 - 0.3 - 1 - 3 A Adjustable tripping: 0 - 0.3 - 1 - 3s (with 0.03 A possible only 0s)
		Breaking capacity Icu 25 kA (400 V \sim)
	4P	In (A)
1	420 225	100
1	420 227	160
1	420 228	200
1	420 229	250
		Breaking capacity Icu 36 kA (400 V \sim)
1	420 255	100
1	420 257	160
1	420 258	200
1	420 259	250
		Breaking capacity Icu 50 kA (400 V \sim)
1	420 285	100
1	420 287	160
1	420 288	200
1	420 289	250
		Breaking capacity Icu 70 kA (400 V \sim)
1	420 625	100
1	420 627	160
1	420 628	200
1	420 629	250

Red catalogue numbers: New products



DPX³ 250 electronic release

MCCBs from 40 to 250 A



420 369



420 325



Technical characteristics and tripping curves (p. 60-62)
Dimensions (p. 55)

Can be mounted on rail or on plate in XL³ cabinets and enclosures
MCCBs for switching, control isolation and protection of low voltage electrical lines
Supplied with insulated shileds, screw terminals 120 mm² max. (flexible cable) or 150 mm² max. rigid cable with accessories
Can be fitted with accessories and DPX³ common auxiliaires (p. 32)
Conform to IEC 60947-2

Pack	Cat.Nos		MCCBs - fixed version	Pack	Cat.Nos	MCCBs with electronic earth leakage module - fixed version
			Protection against overloads: I _r adjustable from 0.4 to 1 x I _n T _r adjustable from 3 to 15s (p. 62) Protection against short circuits: I _{sd} adjustable from 1.5 to 10 x I _r T _{sd} adjustable from 0 to 0.5s (p. 62) Breaking capacity I _{cu} 25 kA (400 V~)			Protection against overloads: I _r adjustable from 0.4 to 1 x I _n T _r adjustable from 3 to 15s (p. 62) Protection against short circuits: I _{sd} adjustable from 1.5 to 10 x I _r T _{sd} adjustable from 0 to 0.5s (p. 62) Equipped with earth leakage module with LCD screen Adjustable sensitivity: 0.03 - 0.3 - 1 - 3 A Adjustable tripping: 0 - 0.3 - 1 - 3s (with 0.03 A possible only 0s) Breaking capacity I _{cu} 25 kA (400 V~)
			In (A)			In (A)
1	3P	4P	40		4P	40
1	420 302	420 312	100	1	420 322	100
1	420 305	420 315	160	1	420 325	160
1	420 307	420 317	250	1	420 327	160
1	420 309	420 319		1	420 329	250
			Breaking capacity I _{cu} 36 kA (400 V~)			Breaking capacity I _{cu} 36 kA (400 V~)
1	420 332	420 342	40			40
1	420 335	420 345	100	1	420 352	100
1	420 337	420 347	160	1	420 355	160
1	420 339	420 349	250	1	420 357	160
			Breaking capacity I _{cu} 50 kA (400 V~)			Breaking capacity I _{cu} 50 kA (400 V~)
1	420 362	420 372	40	1	420 359	250
1	420 365	420 375	100			40
1	420 367	420 377	160	1	420 382	100
1	420 369	420 379	250	1	420 385	160
			Breaking capacity I _{cu} 70 kA (400 V~)			Breaking capacity I _{cu} 70 kA (400 V~)
1	420 635	420 645	40	1	420 387	160
1	420 637	420 647	100	1	420 389	250
1	420 638	420 648	160			40
1	420 639	420 649	250	1	420 655	100
				1	420 657	160
				1	420 658	160
				1	420 659	250

Red catalogue numbers: New products

DPX³ 250 electronic release

MCCBs from 40 to 250 A (continued)



420 649

Technical characteristics and tripping curves (p. 60-62)
 Dimensions (p. 55)

Can be mounted on rail or on plate in XL³ cabinets and enclosures
 MCCBs for switching, control isolation and protection of low voltage electrical lines
 Supplied with insulated shileds, screw terminals 120 mm² max. (flexible cable) or 150 mm² max. rigid cable with accessories
 Can be fitted with accessories and DPX³ common auxiliaires (p. 32)
 Conform to IEC 60947-2

Pack	Cat.Nos		
			MCCBs with energy metering central unit - fixed version
			Protection against overloads: Ir adjustable from 0.4 to 1 x In Tr adjustable from 3 to 15s (p. 62) Protection against short circuits: I _{sd} adjustable from 1.5 to 10 x Ir T _{sd} adjustable from 0 to 0.5s (p. 62) Integrated energy metering central unit with LCD screen; currents, voltage, frequency, power, energy and harmonics
			Breaking capacity I _{cu} 25 kA (400 V \sim)
	3P	4P	In (A)
1	420 402	420 412	40
1	420 405	420 415	100
1	420 407	420 417	160
1	420 409	420 419	250
			Breaking capacity I _{cu} 36 kA (400 V \sim)
1	420 432	420 442	40
1	420 435	420 445	100
1	420 437	420 447	160
1	420 439	420 449	250
			Breaking capacity I _{cu} 50 kA (400 V \sim)
1	420 462	420 472	40
1	420 465	420 475	100
1	420 467	420 477	160
1	420 469	420 479	250
			Breaking capacity I _{cu} 70 kA (400 V \sim)
1	420 665	420 675	40
1	420 667	420 677	100
1	420 668	420 678	160
1	420 669	420 679	250

Pack	Cat.Nos	
		MCCBs with energy metering central unit and electronic earth leakage module - fixed version
		Protection against overloads: Ir adjustable from 0.4 to 1 x In Tr adjustable from 3 to 15s (p. 62) Protection against short circuits: I _{sd} adjustable from 1.5 to 10 x Ir T _{sd} adjustable from 0 to 0.5s (p. 62) Equipped with earth leakage module with LCD screen Adjustable sensitivity: 0.03 - 0.3 - 1 - 3 A Adjustable tripping: 0 - 0.3 - 1 - 3s (with 0.03 A possible only 0s) Integrated energy metering central unit with LCD screen; currents, voltage, frequency, power, energy and harmonics
		Breaking capacity I _{cu} 25 kA (400 V \sim)
	4P	In (A)
1	420 422	40
1	420 425	100
1	420 427	160
1	420 429	250
		Breaking capacity I _{cu} 36 kA (400 V \sim)
1	420 452	40
1	420 455	100
1	420 457	160
1	420 459	250
		Breaking capacity I _{cu} 50 kA (400 V \sim)
1	420 482	40
1	420 485	100
1	420 487	160
1	420 489	250
		Breaking capacity I _{cu} 70 kA (400 V \sim)
1	420 685	40
1	420 687	100
1	420 688	160
1	420 689	250

Communication interface (p. 32)



DPX³ 250 electronic release
MCCBs from 40 to 250 A (continued)



420 549

Technical characteristics and tripping curves (p. 60-62)
Dimensions (p. 55)

Can be mounted on rail or on plate in XL³ cabinets and enclosures MCCBs for switching, control isolation and protection of low voltage electrical lines
Supplied with insulated shileds, screw terminals 120 mm² max. (flexible cable) or 150 mm² max. rigid cable with accessories
Can be fitted with accessories and DPX³ common auxiliaires (p. 32)
Conform to IEC 60947-2

Pack	Cat.Nos		Electronic release Sg MCCBs - fixed version
			Protection against overloads: I _r adjustable from 0.4 to 1 x I _n T _r adjustable from 3 to 15s (p. 62) Protection against short circuits: I _{sd} adjustable from 1.5 to 10 x I _r T _{sd} adjustable from 0 to 0.5s (p. 62) Protection against earth fault: I _g adjustable: from 0.2 to 1 x I _n and OFF position T _g adjustable from 0.1 to 1s (p. 62)
			Breaking capacity I _{cu} 25 kA (400 V \sim)
	3P	4P	I _n (A)
1	420 502	420 512	40
1	420 505	420 515	100
1	420 507	420 517	160
1	420 509	420 519	250
			Breaking capacity I _{cu} 36 kA (400 V \sim)
1	420 522	420 532	40
1	420 525	420 535	100
1	420 527	420 537	160
1	420 529	420 539	250
			Breaking capacity I _{cu} 50 kA (400 V \sim)
1	420 542	420 552	40
1	420 545	420 555	100
1	420 547	420 557	160
1	420 549	420 559	250
			Breaking capacity I _{cu} 70 kA (400 V \sim)
1	420 692	420 702	40
1	420 695	420 705	100
1	420 697	420 707	160
1	420 699	420 709	250

DPX³ 250 equipment and mounting accessories



421 044



421 031



421 072


Pack	Cat.Nos	Equipment for plug-in version
		A plug-in version DPX ³ is a fixed version DPX ³ mounted on a plug-in base Plug-in bases for DPX ³ 160 Front or rear terminal mounting base
1	421 042	For DPX ³ 250 - 3P
1	421 043	For DPX ³ 250 - 4P with or without earth leakage module
		Connectors for auxiliary contacts Set of connectors
1	421 044	
		Padlocks for plug-in base Ronis locking accessory
1	421 045	
1	421 046	Profalux locking accessory
1	421 047	Padlock accessory

Pack	Cat.Nos	Connection accessories
		Cage terminals For Cu/Al cables, 1 x 150 mm ² for flexible cables and 1 x 180 mm ² for rigid cable and bars or lugs 25 x 8 mm
1	421 030	Set of 3 terminals
1	421 031	Set of 4 terminals
		Insulated shields Set of 3 insulated shields
1	421 070	
		Spreaders For incoming bars or cable lugs Set of 3 spreaders for DPX ³ 250 3P Set of 4 spreaders for DPX ³ 250 4P
1	421 034	
1	421 035	
		Rear terminals Flat swivel terminals Used to convert a fixed version with front terminals to a fixed version with rear terminals
1	421 038	Set of 3 rear terminals for DPX ³ 250 3P
1	421 039	Set of 4 rear terminals for DPX ³ 250 4P

Pack	Cat.Nos	Sealable terminal shields
		For front terminals For DPX ³ 250 3P For DPX ³ 250 4P
1	421 056	
1	421 057	
		For rear terminals For DPX ³ 250 3P For DPX ³ 250 4P
1	421 052	
1	421 053	
		Fixing plates For fixing DPX ³ 250 on rail or on plate For DPX ³ 250 3P/4P without earth leakage module For DPX ³ 250 4P with earth leakage module For DPX ³ 250 3P/4P with side mounting motor operator
1	421 072	
1	421 074	
1	421 069	

XL³ mounting accessories (p. 46-53)
Accessories (p. 32)

DPX³ 160 and 250 common auxiliaries and accessories

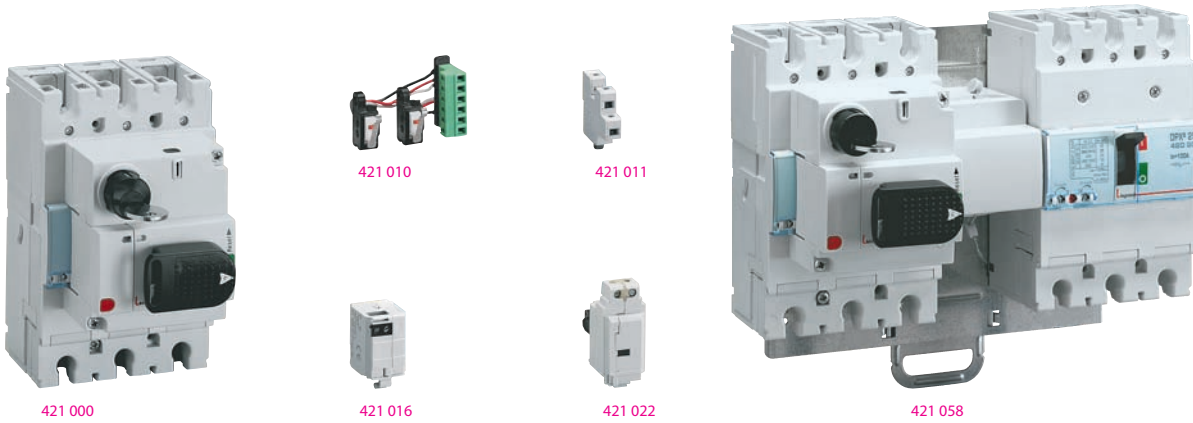

Pack	Cat.Nos	Supply inverter type
1	421 058	Plate for mounting and interlocking of 2 DPX ³ For 2 DPX ³ 160 or 2 DPX ³ 250 or 1 DPX ³ 160 and 1 DPX ³ 250
1	421 059	For fixed version For plug-in and draw-out version
Rotary handles		
1	421 000	Direct on DPX Standard handle for thermal magnetic DPX ³ without earth leakage module
1	421 001	Standard handle for electronic DPX ³ and/or with earth leakage module
1	421 002	Handle for emergency use for thermal magnetic DPX ³ without earth leakage module
1	421 003	Handle for emergency use for electronic DPX ³ and/or with earth leakage module
Vari-depth handles		
For all version of DPX ³		
1	421 004	Standard handle
1	421 005	Handle for emergency use
Locking accessories		
1	421 006	Ronis for direct handle
1	421 007	Profalux for direct handle
1	421 008	Ronis for vari-depth handle
1	421 009	Profalux for vari-depth handle
Motor-driven handles		
Motor operators 24 to 230 V \sim /=		
1	421 060	Side motor operator
1	421 061	Front motor operator
Locking accessories		
1	421 062	Ronis key barrel for front motor operator
1	421 063	Profalux key barrel for front motor operator
1	421 064	Padlock for front motor operator
1	421 065	Ronis key barrel for side motor operator
1	421 066	Profalux key barrel for side motor operator
1	421 067	Padlock for side motor operator


Pack	Cat.Nos	Auxiliaries
Auxiliary contacts		
1	421 010	1 N/C + 1 N/O auxiliary contact for rotary handles
1	421 011	Auxiliary contact or fault signalling contact
1	421 048	Signalling contact plugged-in / drawn-out (for DPX ³ plug-in version)
Shunt releases		
1	421 012	12 V \sim /=
1	421 013	24 V \sim /=
1	421 014	48 V \sim /=
1	421 015	110-130 V \sim /=
1	421 016	200-277 V \sim /=
1	421 017	380-480 V \sim /=
Undervoltage releases		
1	421 018	12 V \sim /=
1	421 019	24 V \sim /=
1	421 020	48 V \sim /=
1	421 021	110-130 V \sim /=
1	421 022	200-240 V \sim /=
1	421 023	277 V \sim
1	421 024	380-415 V \sim
1	421 025	440-480 V \sim
Locking accessory		
1	421 049	Padlock for locking in "open" position
Communication interface		
1	421 075	Modbus

Red catalogue numbers: New products




DPX³ 160/250


n Auxiliaries mounting

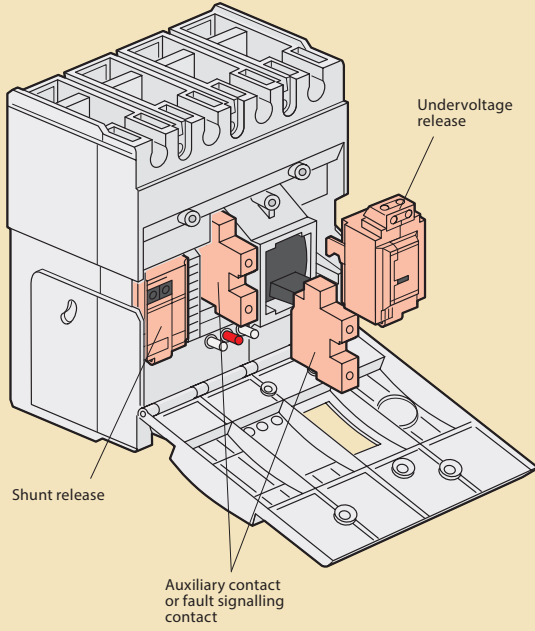


n Direct rotary handle

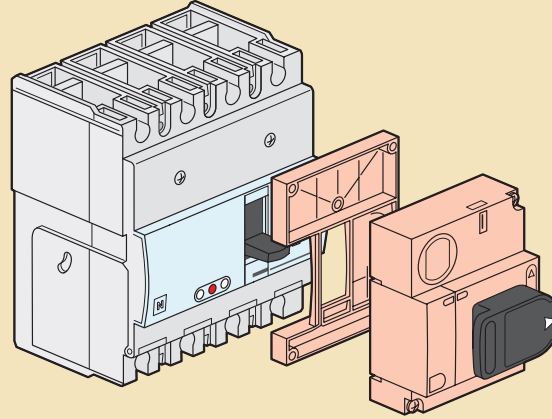


n Plug-in version

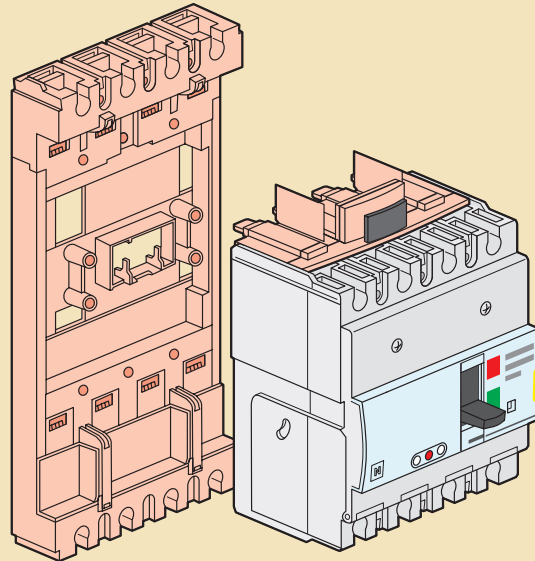


n Side mounting motor-driven handle

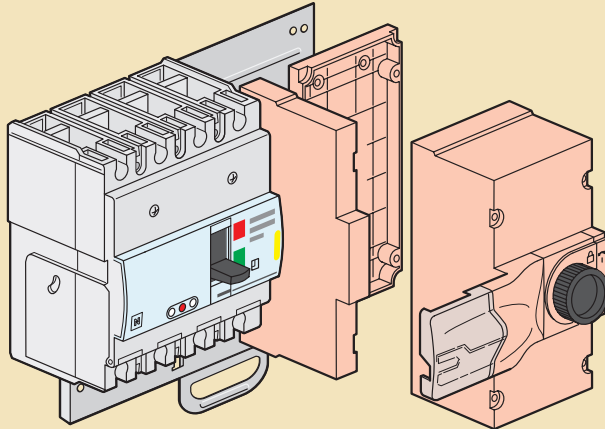

n Front mounting motor-driven handle

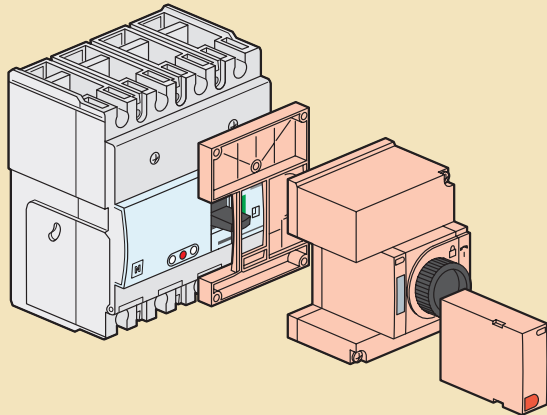

n Supply inverter type

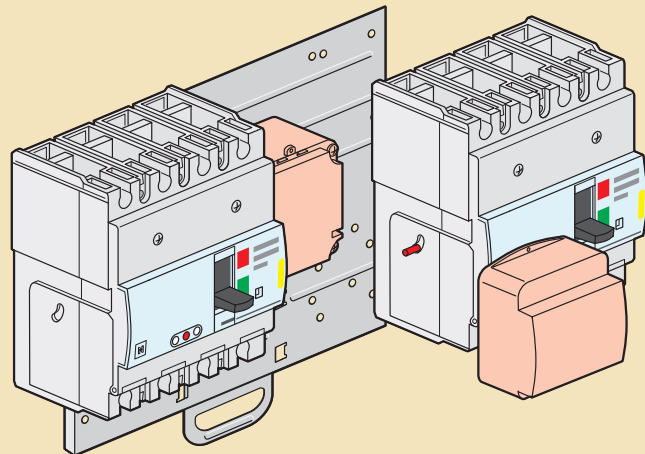

DPX™ 250
thermal magnetic and electronic release MCCBs from 40 to 250 A



253 56



253 73

Dimensions (p. 57)
Electrical characteristics (p. 62-63)

MCCBs for switching, control isolation and protection of low voltage electrical lines
Can be fitted with auxiliaries (p. 42)
Can be used with earth leakage modules (p. 35) or with residual current relays (p. 43)
Supplied complete with:
- connection plates for bars
- upstream and downstream connection devices for lugs (width max. 20 mm)
- terminal shields
Conform to IEC 60947-2
Sealable adjustment
Can be mounted on plate in XL³ cabinets and enclosures

Pack	Cat.Nos		Thermal magnetic MCCBs - fixed version
			Thermal adjustable from 0.64 to 1 In Magnetic adjustable from 3.5 to 10 In
			Breaking capacity I _{cu} 36 kA (400 V~)
	3P	4P	In (A)
1	253 28	253 45	40
1	253 29	253 46	63
1	253 30	253 47	100
1	253 31	253 48	160
1	253 32	253 49	250
	3P + N/2		In (A)
1	253 41		160
1	253 42		250
			Breaking capacity I _{cu} 70 kA (400 V~)
	3P	4P	In (A)
1	253 52	253 69	40
1	253 53	253 70	63
1	253 54	253 71	100
1	253 55	253 72	160
1	253 56	253 73	250
	3P + N/2		In (A)
1	253 66		250

Pack	Cat.Nos		Electronic release S1 MCCBs - fixed version
			Adjustment of I _r and I _{sd} (p. 63) Instantaneous protection 40 A: if = 1 kA 100/160/250 A: if = 3 kA Indicator lamp Minimum current for indicator lamp operation (30 % of I _n) - green: normal - fixed red: I ≥ 0.9 I _r - flushing red: I ≥ 1.05 I _r Connector for test unit Dynamic selectivity 4P version: adjustment of neutral on front panel
			Breaking capacity I _{cu} 36 kA (400 V~)
	3P	4P	In (A)
1	254 01	254 07	40
1	254 03	254 09	100
1	254 04	254 10	160
1	254 05	254 11	250
			Breaking capacity I _{cu} 70 kA (400 V~)
			In (A)
1	254 13	254 19	40
1	254 15	254 21	100
1	254 16	254 22	160
1	254 17	254 23	250



DPX™ 250

thermal magnetic and electronic release MCCBs from 40 to 250 A (continued)




260 55



260 53



265 32

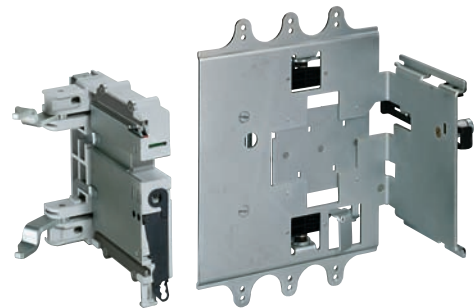

265 46

Pack	Cat.Nos		Electronic release S2 MCCBs - fixed version
			Breaking capacity I_{cu} 36 kA (400 V~)
	3P	4P	I_n (A)
1	254 40	254 45	40
1	254 41	254 46	100
1	254 42	254 47	160
1	254 43	254 48	250
			Breaking capacity I_{cu} 70 kA (400 V~)
1	254 50	254 55	40
1	254 51	254 56	100
1	254 52	254 57	160
1	254 53	254 58	250

Pack	Cat.Nos		Electronic earth leakage modules
	3P	4P	I_n (A)
1		260 51	160
1	260 54	260 55	250
			LED version Monitors the isolation state of the installation via a series of LEDs
	4P		I_n (A)
1		260 53	160
1		260 57	250

Pack	Cat.Nos		Plug-in version
1	3P 265 29	4P 265 30	Tulip contacts Set of tulip contacts (supplied with an incoming/outgoing protective cover)
1	265 31	265 32	Bases for DPX only
1	265 33	265 34	Accept DPX/DPX-I fitted with tulip contacts
1	265 35	265 36	Front terminal mounting base Rear terminal mounting base with threaded rod Flat rear terminal mounting base
			Bases for DPX with earth leakage module
1		4P 265 37	Front terminal mounting base
1		265 38	Rear terminal mounting base with threaded rod
1		265 39	Flat rear terminal mounting base
			Accessories
1		263 99	Set of connectors (8-pin)
1		098 19	Set of connectors (6-pin)
1		263 43	Set of 2 extractor handle

Pack	Cat.Nos		Draw-out version
			"Debro-lift" mechanism Supplied with a rigid slide and handle for drawing-out
1	3P 265 45	4P 265 46	For DPX base only
1		265 47	For DPX base with earth leakage module
			Key lock for "Debro-lift" mechanism Enable locking of DPX in drawn-out position
1		265 76	1 key Ronis for DPX only
1		265 78	1 key Ronis for motorised DPX or with rotary handle
			Accessories for "Debro-lift" mechanism
1		265 75	Isolated handle for drawing-out
1		265 74	Signalling contact (plugged-in/drawn-out)

Pack	Cat.Nos		Supply inverter type
1		264 08	Universal plate for MCCB or trip-free switch fixed version
1		264 03	Universal plate for MCCB or trip-free switch plug-in and draw-out version




For DPX-L 250 100 kA and Sg electronic release version, please consult us

Red catalogue numbers: New products



DPX™ 250
equipment and accessories



262 22



262 79



262 80



261 30

Pack	Cat.Nos	Rotary handles
1	262 22	Direct on DPX
1	262 24	Standard (grey)
		For emergency use (red/yellow) - can be fitted on Cat.Nos 262 22, 262 41 or 262 81
		Vari-depth handle IP 55
		Comprising: connection rod, bracket, self-adhesive drilling template, mounting accessories and door lock mechanism
1	262 79	Standard (black)
1	262 80	Conversion kit for emergency use
		Can be fitted on Cat.No 262 79
		Locking accessories
1	262 92	Eurolocks for vari-depth handle
1	262 93	Profalux for vari-depth handle
1	262 94	Ronis for vari-depth handle
1	262 25	Eurolocks for direct handle

Pack	Cat.Nos	Motor-driven handles
		Front operated
1	261 30	24 V~ / ∞
1	261 34	230 V~
		Accessory
1	261 59	Ronis locking accessory

Pack	Cat.Nos	Accessories
		Insulated shields
1	262 30	Set of 3
		Sealable terminal shields
1	262 26 262 27	Set of 2 long terminal shields
1	262 28 262 29	Set of 2 short terminal shields
		Padlock
1	262 21	For locking in "open" position
		Cage terminals
1	262 35	Set of 4 terminals for cable 185 mm² max. (rigid) or 150 mm² max. (flexible)
		Adaptor for lug
1	262 31	For connecting bare cables with wide lug
		Set of 1 adaptor + insulated shields
		Extended front terminals
1	262 32	Set of 4
		Spreaders
1	262 33 262 34	Set of spreaders incoming or outgoing
		Rear terminals
		Used to convert the fixed version with front terminals to the fixed version with rear terminals
1	263 31 263 32	Set of rear terminals, incoming or outgoing
1	265 27 265 28	Set of flat rear terminals, incoming or outgoing
		Distribution terminal 250 A
1	048 68	250 A - 4 outputs 35 mm² flexible and 2 outputs 25 mm² flexible - Isc peak 36 kA
		Can be fitted directly onto downstream terminal of DPX 250/250 ER and DPX-IS 250



DPX™ 630

thermal magnetic and electronic release MCCBs from 250 to 630 A



255 37



Dimensions (p. 58)
Electrical characteristics (p. 62-63)

Moulded case MCCBs for switching, control isolation and protection of low voltage electrical lines
Can be fitted with auxiliaries (p. 42)
Can be used with earth leakage modules or with residual current relays (p. 43)
Supplied complete with:
- connection plates for bars
- terminal shields
Conform to IEC 60947-2 - Sealable adjustment
Can be mounted on plate in XL³ cabinets and enclosures

Pack	Cat.Nos		
			Thermal magnetic MCCBs - fixed version
			Thermal adjustable from 0.8 to 1 In Magnetic adjustable from 5 to 10 In
			Breaking capacity Icu 36 kA (400 V~)
	3P	4P	In (A)
1	255 21	255 36	250
1	255 22	255 37	320
1	255 23	255 38	400
1	255 25	255 39	500
1	255 24	255 40	630
	3P + N/2		In (A)
1	255 32		320
1	255 33		400
1	255 35		500
1	255 34		630
			Breaking capacity Icu 70 kA (400 V~)
	3P	4P	In (A)
1	255 42	255 57	320
1	255 43	255 58	400
1	255 45	255 59	500
1	255 44	255 60	630
	3P + N/2		In (A)
1	255 52		320
1	255 53		400
1	255 55		500
1	255 54		630

Pack	Cat.Nos		
			DPX 630 electronic release S1
			Adjustment of Ir, I _{sd} (p. 63) Instantaneous protection I _f = 5 kA Green indicator lamp Connector for test unit Dynamic selectivity 4P version: adjustment of neutral on front panel
			Breaking capacity Icu 36 kA (400 V~)
	3P	4P	In (A)
1	256 01	256 05	250
1	256 02	256 06	400
1	256 03	256 07	630
			Breaking capacity Icu 70 kA (400 V~)
			In (A)
1	256 10	256 14	400
1	256 11	256 15	630

DPX™ 630
thermal magnetic and electronic release MCCBs
from 250 to 630 A (continued)



256 35



260 63

Pack	Cat.Nos		Electronic release S2 MCCBs - fixed version
			Adjustment of Ir, I _{sd} , Tr, T _{sd} (opposite) Instantaneous protection I _f = 5 kA Green indicator lamp Connector for test unit Logic and dynamic selectivity 4P version: adjustment of neutral on front panel
			Breaking capacity I _{cu} 36 kA (400 V~)
	3P	4P	I _n (A)
1	256 26	256 30	250
1	256 27	256 31	400
1	256 28	256 32	630
			Breaking capacity I _{cu} 70 kA (400 V~)
			I _n (A)
1	256 35	256 39	400
1	256 36	256 40	630
			Breaking capacity I _{cu} 100 kA (400 V~)
			I _n (A)
1	256 43	256 47	400
1	256 44	256 48	630


		Earth leakage modules	
		Can be fitted onto DPX/DPX-I 630 Adjustable, sealable sensitivity: 0.03 - 0.3 - 1 - 3 A Adjustable, time delay: 0 - 0.3 - 1 - 3 s Test push-button Reset push-button Remote earth fault signalling contact Switch for mechanical tests (installation insulation test) Mounted underneath 230-500 V~ Standard	
		3P	4P
1		260 60	260 61
1		260 64	260 65
		LED version Monitors the isolation state of the installation via a series of LEDs	
		4P	I _n
1		260 63	400 A
1		260 67	630 A

For DPX-L 630 100 kA and Sg electronic release version, please consult us

DPX™ 630


n Performance data

S1 - Adjustment of Ir, I_{sd}



- Long delay protection against overloads with an adjustable threshold based on the rms value of the current:
I_r = 0.4 - 0.5 - 0.7 - 0.8 - 0.95 - 1 x I_n (8 steps)
T_r = 5 s (fixed at 6 t_r)
- Short delay protection against short-circuits with an adjustable I_m threshold:
I_{sd} = 1.5 - 2 - 3 - 4 - 5 - 6 - 8 - 10 x I_r (8 steps)
T_{sd} = 0.05 s (fixed)
- Instantaneous protection
if with fixed threshold: I_f = 5 kA


S2 - Adjustment of Ir, Tr, I_{sd}, T_{sd}




- Long delay protection against overloads with an adjustable threshold based on the rms value of the current:
I_r = 0.4 - 0.5 - 0.7 - 0.8 - 0.9 - 0.95 - 1 x I_n (8 steps)
T_r = 5 - 10 - 20 - 30 s (at 6 I_r) (4 steps)
- Short delay protection against short-circuits with an adjustable I_{sd} threshold:
I_{sd} = 1.5 - 2 - 3 - 4 - 5 - 6 - 8 - 10 x I_r (8 steps)
T_{sd} = 0 - 0.1 - 0.2 - 0.3 s (4 steps)
T_{sd} = 0.01 - 0.1 - 0.2 - 0.3 s at 12 x I_r (I₂ t constant) (4 steps)
- Instantaneous protection against short-circuits
with fixed threshold: I_f = 5 kA



DPX™ 630 equipment and accessories



265 57



265 67



262 50



262 51



262 48

Pack	Cat.Nos		Plug-in version
1	3P 265 50	4P 265 51	A plug-in is a DPX fitted with tulip contacts mounted on a base Tulip contacts Set of tulip contacts (supplied with an incoming/outgoing protective cover) Bases for DPX only Accept DPX/DPX-I fitted with tulip contacts
1	265 52	265 53	Front terminal mounting base
1	265 54	265 55	Rear terminal mounting base with threaded rod
1	265 56	265 57	Flat rear terminal mounting base
1	4P		Bases for DPX with earth leakage module
1	265 58		Front terminal mounting base
1	265 59		Rear terminal mounting base with threaded rod
1	265 60		Flat rear terminal mounting base
1	263 68		Accessories
1	263 99		Set of 2 extractor handle Set of connectors (8-pin)

Pack	Cat.Nos	Rotary handles (continued)
1	262 81	Vari-depth handle IP 55 Comprising: connection rod, bracket, self-adhesive drilling template, mounting accessories and door lock mechanism
1	262 82	Standard (grey) For emergency use (red/yellow) can be fitted on Cat.Nos 262 81 or 262 41
1	262 92	Locking accessories
1	262 93	Eurolocks for vari-depth handle
1	262 94	Profalux for vari-depth handle
1	262 25	Ronis for vari-depth handle Eurolocks for direct handle

Pack	Cat.Nos	Motor-driven handles
1	261 40	Front operated 24 V~ / =
1	261 44	230 V~
1	261 59	Accessory Ronis locking accessory

Pack	Cat.Nos		Draw-out version
1	3P 265 66	4P 265 67	A DPX draw-out version is a plug-in DPX fitted with a "Debro-lift" mechanism which can be used to withdraw the DPX while keeping it on its base "Debro-lift" mechanism Supplied with a rigid slide and handle for drawing-out
1	265 68		For DPX base only For DPX base with earth leakage module
1	265 76		Key-lock for "Debro-lift" mechanism
1	265 78		Enable locking of DPX in drawn-out position 1 key Ronis for DPX only 1 key Ronis for motorised DPX or with rotary handle
1	265 75		Accessories for "Debro-lift" mechanism
1	265 74		Isolated handle for drawing-out Signalling contact (plugged-in/drawn-out)

Pack	Cat.Nos		Accessories
1	262 30		Insulated shields Set of 3
1	3P 262 44	4P 262 45	Sealable terminal shields Set of 2
1	262 40		Padlock For locking in "OPEN" position
1	262 50		Cage terminals Set of 4 terminals for cable 300 mm² max. (rigid) or 240 mm² max. (flexible)
1	262 51		Set of 4 high-capacity terminals for cable 2 x 240 mm² (rigid) or 2 x 185 mm² (flexible)
1	262 46		Adaptor for lug For connecting bare cables with wide lugs Set of 4 adaptors + insulated shields
1	262 47		Extended front terminals Set of 4
1	3P 262 48	4P 262 49	Spreaders Set of incoming or outgoing spreaders
1	263 50		Rear terminals Used to convert the fixed version with front terminals to the fixed version with rear terminals
1	263 52	263 51	Set of incoming or outgoing swivel terminals
1	265 53		Set of incoming or outgoing flat terminals

Pack	Cat.Nos	Supply inverter type
1	264 09	Factory assembled A supply inverter type is composed of one plate with interlock for 2 devices
1	264 04	Plate for MCCB or trip-free switch fixed version Plate for MCCB or trip-free switch plug-in and draw-out version

Pack	Cat.Nos	Rotary handles
1	262 41	Direct on DPX
1	262 24	Standard (grey) For emergency use (red/yellow) - can be fitted on Cat.Nos 262 22, 262 41 or 262 81

DPX™ 1250 and 1600
thermal magnetic and electronic release MCCBs from 800 to 1600 A



258 16



258 23

Dimensions (p. 59)
Electrical characteristics (p. 62-63)

Moulded case MCCBs for switching, control isolation and protection of low voltage electrical lines
Can be fitted with auxiliaries (integrated terminal blocks)
Can be used with earth leakage modules or with residual current relays (p. 43)
Supplied complete with:
- connection plates for bars
- terminal shields
Conform to IEC 60947-2
Fixed version - Sealable adjustment

Pack	Cat.Nos		Thermal magnetic MCCBs - fixed version
			Thermal adjustable from 0.8 to 1 In Magnetic adjustable from: 5 to 10 In
			Breaking capacity Icu 50 kA (400 V~)
			In (A)
1	3P 258 02	4P 258 09 ⁽¹⁾	800
1	258 03	258 10 ⁽¹⁾	1000
1	258 04	258 11 ⁽¹⁾	1250
			Breaking capacity Icu 70 kA (400 V~)
			In (A)
1	258 16	258 23 ⁽¹⁾	800
1	258 17	258 24 ⁽¹⁾	1000
1	258 18	258 25 ⁽¹⁾	1250

Pack	Cat.Nos		Electronic release S2 MCCBs - fixed version
			Adjustment of Ir, I _{sd} , Tr, T _{sd} Instantaneous protection I _f = 20 kA (for In 1600 A) Indicator lamp Minimum current for indicator lamp operation (20 % In): green: normal; fixed red: I ≥ 0.9 Ir; flashing red: I ≥ 1.05 Ir Connector for test unit Logic and dynamic selectivity
			Breaking capacity Icu 50 kA (400 V~)
			In (A)
1	3P 257 26	4P 257 30 ⁽²⁾	800
1	257 27	257 31 ⁽²⁾	1250
1	257 28	257 32 ⁽²⁾	1600
			Breaking capacity Icu 70 kA (400 V~)
			In (A)
1	257 34	257 38 ⁽²⁾	800
1	257 35	257 39 ⁽²⁾	1250
1	257 36	257 40 ⁽²⁾	1600

Pack	Cat.Nos		Electronic release S1 MCCBs - fixed version
			Adjustment of Ir, I _{sd} Instantaneous protection I _f = 20 kA (for In 1600 A) Indicator lamp Minimum current for indicator lamp operation (20 % In): green: normal; fixed red: I ≥ 0.9 Ir; flashing red: I ≥ 1.05 Ir Connector for test unit Dynamic selectivity
			Breaking capacity Icu 50 kA (400 V~)
			In (A)
1	3P 257 02	4P 257 06 ⁽²⁾	800
1	257 03	257 07 ⁽²⁾	1250
1	257 04	257 08 ⁽²⁾	1600
			Breaking capacity Icu 70 kA (400 V~)
			In (A)
1	257 10	257 14 ⁽²⁾	800
1	257 11	257 15 ⁽²⁾	1250
1	257 12	257 16 ⁽²⁾	1600




For DPX-L 1250 100 kA and Sg electronic release version, please consult us

(1) Neutral without protection
(2) Neutral settings 0 - 0.5 - 1 N (0 - 50% - 100% Neutral)



DPX™ 1600 equipment and accessories

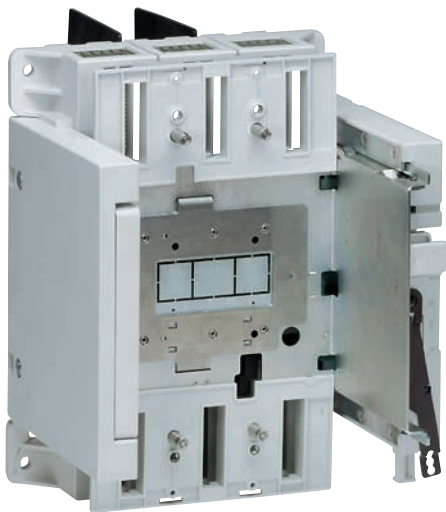

265 84 (supplied assembled)



262 60



262 70



262 67 + 262 68

Pack	Cat.Nos	Draw-out version
1	3P 265 82	A DPX draw-out version is a plug-in DPX fitted with a "Debro-lift" mechanism which can be used to withdraw the DPX while keeping it on its base
1	4P 265 83	Draw-out base
1	265 84	Base for DPX 1600 supplied with "Debro-lift" assembled a rigid slide and handle for drawing-out
1	265 85	Front terminals
1		Rear terminals
1	265 76	Key lock for "Debro-lift" mechanism
1	265 80	Enable locking of DPX in drawn-out position
1		One key Ronis for DPX only
1		Two key Ronis (one key supplied) for motorised DPX or with rotary handle
1	265 75	Accessories for "Debro-lift" mechanism
1	265 74	Isolated handle for drawing-out
1		Signalling contact (plugged-in/drawn-out)

Pack	Cat.Nos	Supply inverter type
1	264 10	A supply inverter type is composed of one plate with interlock for 2 devices
1	264 05	Plate for MCCBs or trip-free switch fixed version
1		Plate for MCCBs or trip-free switch plug-in and draw-out version

Pack	Cat.Nos	Rotary handles
1	262 61	Direct on DPX Standard (black)
1		Vari-depth handle IP 55
1		Comprising: connection rod, bracket, self-adhesive drilling template, mounting accessories and door lock mechanism
1	262 83	Standard (black)
1	262 84	For emergency use (red/yellow)
1		Locking accessories
1	262 92	Eurolocks for vari-depth handle
1	262 93	Profalux for vari-depth handle
1	262 94	Ronis for vari-depth handle
1	262 25	Eurolocks for direct handle

Pack	Cat.Nos	Motor-driven handles
1	261 54	Factory assembled Front operated 230 V~
1		For DPX1600 up to 1250 A
1	261 24	Front operated
1	261 25	24 V~/=
1	261 23	48 V~/=
1		230 V~/=
1		For DPX1600 In = 1600 A
1	261 19	24 V~/=
1	261 28	48 V~/=
1	261 27	230 V~/=
1		Locking accessory for motor-driven handles
1	261 59	Ronis locking accessory
1	261 58	Profalux locking accessory

Pack	Cat.Nos	Accessories
1	262 66	Insulated shields Used to isolate the connections between each pole
1		Set of 3
1	3P 262 64	Sealable terminal shields
1	4P 262 65	Set of 2
1		Padlock
1	262 60	For locking in "open" position
1	262 69	Cage terminals
1	262 70	Set of 1 terminal for cables without lug 2 x 240 mm ² for rigid cable or 2 x 185 mm ² for flexible cable
1		Set of 1 high-capacity terminal for cables without lug 4 x 240 mm ² for rigid cable 4 x 185 mm ² for flexible cable
1		Extended front terminals
1	262 67	Set of 4
1		Short terminals for 630 - 1250 A (2 bars max. per pole)
1	262 68	Long terminals for 1600 A (3 bars max. per pole)
1		Spreaders
1	3P 262 73	Set of incoming or outgoing spreaders
1	4P 262 74	Rear terminals
1		Used to convert the fixed version with front terminals to the fixed version with rear terminals
1		Set of incoming or outgoing rear terminals
1	263 80	Short terminals
1	263 81	263 82 263 83
1		Long terminals

Red catalogue numbers: New products



DPX™ auxiliaries
for DPX, DPX-I and DPX-IS



261 85



261 93

Pack	Cat.Nos	Auxiliary contact or fault signal
1	261 60	For signalling the state of the contacts or opening of the MCCB on a fault For DPX/DPX-I/DPX-IS Changeover switch 3 A - 240 V~


		Releases	
		Allow remote tripping of a DPX	
		Shunt releases	
		For DPX-IS/DPX-I and DPX	
		Shunt inrush power 300 VA	
1	261 64	Coil voltage 24 V~/=	
1	261 65	Coil voltage 48 V~/=	
1	261 66	Coil voltage 110 V~/=	
1	261 67	Coil voltage 230 V~/=	
1	261 68	Coil voltage 400 V~/=	
		Undervoltage releases	
		For DPX-IS/DPX-I and DPX	
		Undervoltage power consumption 5 VA	
1	261 70	261 80	Coil voltage 24 V=
1	261 71	261 81	Coil voltage 24 V~
1	261 72	261 82	Coil voltage 48 V=
1	261 76	261 86	Coil voltage 110 V~
1	261 73	261 83	Coil voltage 230 V~
1	261 74	261 84	Coil voltage 400 V~
		Time-lag (ms) undervoltage releases	
		Allow remote tripping of a DPX	
		Prevent false tripping in the event of AC supply microbreaks	
		Require a time-lag module connected to the undervoltage releases below	
1	261 90		Time-lag modules 230 V~
1	261 91		Time-lag modules 400 V~
1	261 75		Undervoltage releases For DPX -IS 250, 630
1	261 85		Undervoltage releases For DPX 250 to 1600 and DPX-IS 1600

Number of modules
3
3

Pack	Cat.Nos	Electronic test unit
1	261 97	Test connector and software for connecting DPX to a PC Supplied with test software

		Automation control unit	
		For setting the conditions for supply inversion, generator on loft status acquisition for DMX and DPX circuit-breakers, open/closed Power supply: 230 V~ and 12-24-48 V=	
		Connection by plug-in terminals	
1	261 93	Standard unit	
1	261 94	Communicating unit, enabling data transmission (RS 485 port)	

DPX™ auxiliaries
for DPX, DPX-I and DPX-IS

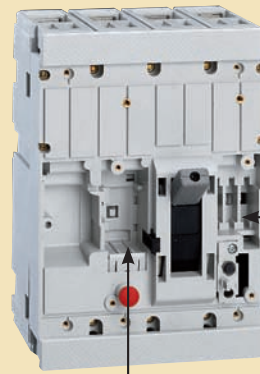

Auxiliary contact or fault signal
A single Cat.No 261 60 auxiliary contact or fault signal



Undervoltage releases



Shunt releases



Time-lag undervoltage releases

Max. number of contacts per DPX-IS device

	Device	Auxiliary contact			Shunt release or undervoltage release
		AC	EBAC	FS	
Without release	DPX-IS 250	1	2	-	-
With release	DPX-IS 250	1	1	1	1

AC = auxiliary contact
EBAC = "early" auxiliary contact
FS = break on trip contact

Max. number of contacts per DPX device

Device	Auxiliary contact		Shunt release or undervoltage release
	AC	FS	
DPX 250	2	1	1
DPX 630	2	2	1
DPX 1600	3	1	1



residual current relay and coils



260 88

260 98

260 93 coil for use with relay

Add residual current protection to DPX³/DPX trip-free switches and DPX³/DPX MCCBs equipped with release

Pack	Cat.Nos	Residual current relay for DPX/DPX ³
1	260 88	<p>Detects fault currents, and, when used with a shunt trip or an undervoltage release, it gives the trip command to a MCCB or a switch</p> <ul style="list-style-type: none"> Comprises: <ul style="list-style-type: none"> - a tinged, sealable window - an auxiliary contact - a green Led indicating energisation - 3 yellow Leds indicating respectively the max. phase earth insulation current: 20, 40 and 60 % - a red Led indicating Fixed: exceeding of the insulation fault current value Flashing: breaking of one of the connections between coils and relays For use with coils: <ul style="list-style-type: none"> - Ø35 and 80 mm Adjustable sensitivity: 0.03, 0.05, 0.075, 0.1, 0.15, 0.2, 0.3, 0.5, 0.75, 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30 A - Ø110 to 210 mm Adjustable sensitivity: 0.3, 0.5, 0.75, 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30 A - Ø150 mm Adjustable sensitivity: 0.5, 0.75, 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30 A - Ø300 mm Adjustable sensitivity: 1, 1.5, 2, 3, 5, 7.5, 10, 15, 20, 30 A Adjustable trip: 0, 0.15, 0.25, 0.5, 1, 2.5, 5 seconds Supply voltage: 230/240 V - 50/60 Hz
		Number of modules 2


Pack	Cat.Nos	Coils
1	260 92	For use with residual current relay Cat.No 260 88
1	260 93	1 coil per DPX, DPX-I and DPX ³
1	260 94	Coil Ø35 mm - 160 A max.
1	260 95	Coil Ø80 mm - 400 A max.
1	260 96	Coil Ø110 mm - 600 A max.
1	260 97	Coil Ø140 mm - 1200 A max.
1	260 98	Coil Ø210 mm - 1800 A max.
1	260 97	Coil Ø150 mm - open - 1200 A max.
1	260 98	Coil Ø300 mm - open - 2000 A max.

Pack	Cat.Nos	Viking 3 disconnecter block for measurement 1 connection										
25	371 92	<p>With its accessories, allows intervention (measurement, maintenance, etc) on a current, voltage and power measuring circuit by keeping the current transformer secondary circuit closed</p> <table border="1"> <thead> <tr> <th>Colour</th> <th>Nominal cross section (mm²)</th> <th>Capacity rigid wire (mm²)</th> <th>Capacity Flexible wire (mm²)</th> <th>Pitch (mm)</th> </tr> </thead> <tbody> <tr> <td>Grey</td> <td>4</td> <td>0.25 to 4</td> <td>0.25 to 4</td> <td>8</td> </tr> </tbody> </table>	Colour	Nominal cross section (mm ²)	Capacity rigid wire (mm ²)	Capacity Flexible wire (mm ²)	Pitch (mm)	Grey	4	0.25 to 4	0.25 to 4	8
Colour	Nominal cross section (mm ²)	Capacity rigid wire (mm ²)	Capacity Flexible wire (mm ²)	Pitch (mm)								
Grey	4	0.25 to 4	0.25 to 4	8								

residual current relay and coils

n Residual current relay


Cat.No 260 88

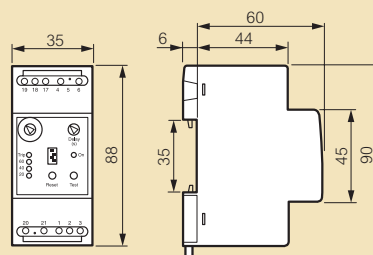

n Coils


Cat.Nos 260 92/93/94/95/96

Cat.No 260 97

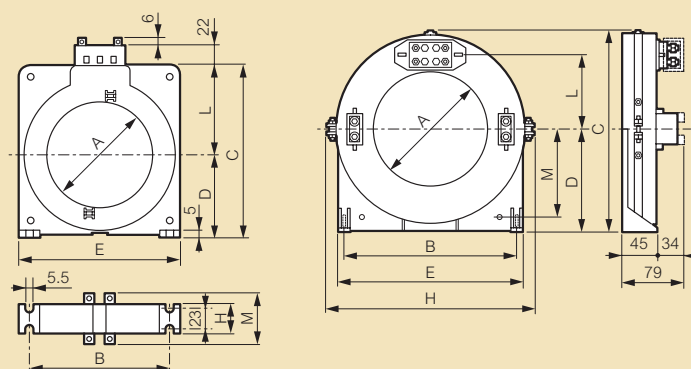

Cat.Nos	A	B	C	D	E	H	L	M
260 92	35	75	85	42	92	36	43	56
260 93	80	108	132	67	125	36	65	56
260 94	110	148	170	86	165	36	84	56
260 95	140	177	206	104	200	36	102	56
260 96	210	270	295	150	290	44	145	64
260 97	150	225	259	133	245	275	95	113

Cat.No 260 98

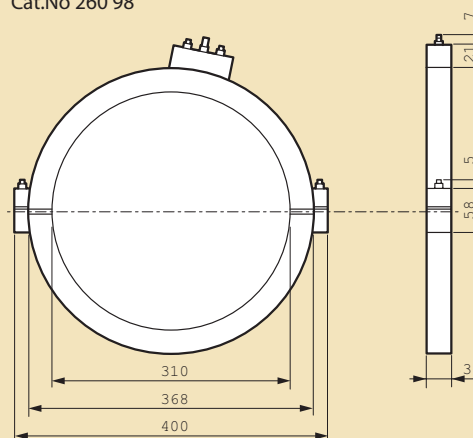

DPX³/DPX magnetic only

motor protection MCCBs up to 400 A



420 713

Dimensions (see opposite)

For switching, control isolation and protection of three-phase motors
Conform to IEC 60947-2

Pack	Cat.Nos	DPX ³ 160
		Fixed magnetic Can be mounted on rail or on plate in XL ³ cabinets and enclosures Supplied with cage terminals 70 mm ² max. (flexible cable) and up to 95 mm ² max. with accessory Can be fitted with auxiliaires (p. 32)
		Breaking capacity Icu 16 kA (400 V~)
	3P	In (A)
1	420 710	16
1	420 711	25
1	420 712	50
1	420 713	63
		Breaking capacity Icu 25 kA (400 V~)
1	420 714	16
1	420 715	25
1	420 716	50
1	420 717	63

Pack	Cat.Nos	DPX 630 electronic
		Adjustable Can be mounted on plate in XL ³ cabinets and enclosures Can be fitted with auxiliaires (p. 42)
		Breaking capacity Icu 36 kA (400 V~)
	3P	In (A)
1	420 726	320
1	420 727	400
		Breaking capacity Icu 70 kA (400 V~)
1	420 728	320
1	420 729	400

Pack	Cat.Nos	DPX ³ 250
		Adjustable magnetic Can be mounted on rail or on plate in XL ³ cabinets and enclosures Supplied with cage terminals 120 mm ² max. (flexible cable) and up to 150 mm ² max. with accessory Can be fitted with auxiliaires (p. 32)
		Breaking capacity Icu 36 kA (400 V~)
	3P	In (A)
1	420 718	100
1	420 719	160
1	420 720	200
1	420 721	250
		Breaking capacity Icu 25 kA (400 V~)
1	420 722	100
1	420 723	160
1	420 724	200
1	420 725	250

Red catalogue numbers: New products



DPX-I™ trip-free switches
125 to 1600 A

DPX-I™ trip-free switches
125 to 1600 A



420 299



253 99



Dimensions (p. 54 to 59)

Trip-free switches for on-load circuit breaking and isolation of low voltage electrical circuits
Can be associated to earth leakage modules or to corresponding DPX residual current relays (p. 43)
Mount on rail up to DPX³ 250 with plate Cat.No 421 072 (DPX³-I 160) and Cat.No 421 071 (DPX³ 250)
Conform to IEC 60947-3
Category of use AC 23 A
Connection identical to corresponding DPX

Pack	Cat.Nos		DPX ³ -I 160
1	3P 420 198	4P 420 199	In (A) 160
1	4P with earth leakage module 420 197		160

Pack	Cat.Nos		DPX ³ -I 250
1	3P 420 299	4P 420 300	In (A) 250
1	4P with earth leakage module 420 298		250

Pack	Cat.Nos		DPX-I 250
1	3P 253 98	4P 253 99	In (A) 250

Pack	Cat.Nos		DPX-I 630
1	3P 255 86	4P 255 87	In (A) 400
1	255 88	255 89	630

Pack	Cat.Nos		DPX-I 1600
1	3P 257 94	4P 257 95	In (A) 800
1	257 96	257 97	1250
1	257 98	257 99	1600

Common auxiliaries to DPX³ (p. 32) and DPX (p. 42)

n Electrical characteristics

	DPX ³ -I 160	DPX ³ -I 250	DPX-I 250	DPX-I 630	DPX-I 1600
Rated operating voltage Ue (V)	50/60 Hz	690 ⁽¹⁾	690 ⁽¹⁾	690	690
	direct	250	250	250	250
Rated insulation voltage Ui (V \sim)	800	800	690	690	690
Rated impulse withstand voltage Uimp (kV)	8	8	8	8	8
Rated closing capacity on 400 V short-circuit Icm (kA)	3	3	4.3	13	40
Short-time resistive current t = 1 s Icw (kA)	1.7	1.7	2.5	7.6	20
Endurance (o.c cycle)	mechanical	25000	25000	20000	15000
	electrical	8000	8000	8000	5000
Conventional thermal current (A)	160	250	250	630	1600
Nominal current of use (A)	160	250	250	630	1600
	AC 23 A (690 V \sim)	(160 V)	(250 V)		
DC 23 A (250 V \sim)	160	160	250	630	-

(1) 500 V for DPX³ - I with earth leakage module
(2) Up to 1250 A

n Dimensions

Dimensions of DPX-I identical to corresponding DPX

DPX-I	Dimensions
DPX ³ -I 160	DPX ³ 160 (see p. 54)
DPX ³ -I 250	DPX ³ 250 (see p. 55)
DPX-I 250	DPX 250 (see p. 57)
DPX-I 630	DPX 630 (see p. 58)
DPX-I 1600	DPX 1600 (see p. 59)

n Choice of faceplates and distribution equipment

Equipment of DPX-I identical to corresponding DPX³/DPX:

Devices	XL ³ 400	XL ³ 800	XL ³ 4000
DPX ³ /DPX ³ -I 160	(p. 46)	(p. 48)	(p. 50)
DPX ³ /DPX ³ -I 250	(p. 46)	(p. 48)	(p. 50)
DPX/DPX-I 250	(p. 46)	(p. 48)	(p. 52)
DPX/DPX-I 630	(p. 46)	(p. 48)	(p. 52)
DPX/DPX-I 1600		(p. 48)	(p. 52)



XL³ 400 equipment selection

Device	Fixing	Position	Configuration	Fixing plate
FIXING ON PLATE				
DPX ³ 160 (Combination possible with DPX ³ 250)	Cabinet or enclosure	vertical	with or without integrated e.l.c.bs and without side motor operator	202 11 + 421 071
			with or without integrated e.l.c.bs and with side motor operator	202 11 + 421 068
			direct rotary handle ⁽¹⁾	202 09
			manual supply inverter ⁽²⁾	202 11 + 421 058
	horizontal	with or without integrated e.l.c.bs	202 13	
Cable sleeve	vertical	with or without integrated e.l.c.bs	202 17	
DPX ³ 250 (Combination possible with DPX ³ 160)	Cabinet or enclosure	vertical	with or without integrated e.l.c.bs and without side motor operator	202 11 + 421 072
			with or without integrated e.l.c.bs and with side motor operator	202 11 + 421 069
			direct rotary handle ⁽¹⁾	202 09
			manual supply inverter ⁽²⁾	202 11 + 421 058
	horizontal	with or without integrated e.l.c.bs	202 15	
Cable sleeve	vertical	with or without integrated e.l.c.bs	202 17	
DPX 250	Cabinet or enclosure	vertical	1 to 2 devices, no e.l.c.bs	202 20
			device only in central position	202 21
			1 to 2 devices, with downstream e.l.c.bs	202 22
			with centred downstream e.l.c.bs	202 23
	horizontal	with or without downstream e.l.c.bs	202 24	
	Cable sleeve	vertical	device only	202 28
			with downstream e.l.c.bs	202 29
DPX 630	Cabinet or enclosure	vertical	1 device, no e.l.c.bs	202 20
			device only in central position	202 21
			1 device, with e.l.c.bs	202 22
			with centred downstream e.l.c.bs	202 23
	horizontal	device only	202 25	
	Cable sleeve	vertical	device only	202 28
			with downstream e.l.c.bs	202 29

(1) Use curved doors only











(2) When the MCCB is fixed at the top or at the bottom of the enclosure, use 200 mm height faceplate Cat.No 202 15

(3) When the MCCB is equipped with terminal shields, use 400 mm height faceplate Cat.No 203 11

(4) When the MCCB is equipped with terminal shields, use 400 mm height faceplate Cat.No 203 17

Red catalogue numbers: New products



Faceplate for devices			
Height (mm)	Metal	Insulating	
300	203 10	203 60	
300	203 10	203 60	202 11 Fixing plate equipped with a rail ┌ for mounting DPX ³ with fixing adaptor For vertical mounting
300	203 09	-	
300	203 10	203 60	
150	203 13	203 65	
300	203 18	-	202 13 Fixing plate for DPX ³ 160 thermal-magnetic For horizontal mounting
300	203 10	203 60	
300	203 10	203 60	
300	203 09	-	
300	203 10	203 60	
200	203 17	203 66	
300	203 18	-	203 10 1/4 turn metal faceplate for DPX ³ in vertical position Height 300 mm
400	203 20	203 70	203 13 1/4 turn metal faceplate for DPX ³ 160 in vertical position Height 150 mm
400	203 21	203 71	
600	203 22	203 72	
600	203 23	203 73	
200	203 24	203 74	202 20 Fixing plate for 1 to 2 DPX 250 or 1 DPX 630 and 1 DPX 250 For vertical mounting
400	203 28	-	202 24 Fixing plate for 1 DPX 250 with or without e.l.c.bs For horizontal mounting
800	203 29	-	
400	203 20	203 70	
400	203 21	203 71	
600	203 22	203 72	203 20 1/4 turn metal faceplate for 1 to 2 DPX 250 or 1 DPX 630 and 1 DPX 250 For vertical mounting Height 400 mm
600	203 23	203 73	203 24 1/4 turn metal faceplate for 1 DPX 250 with or without e.l.c.bs For horizontal mounting Height 200 mm
300	203 25	-	
400	203 28	-	
800	203 29	-	
			
			202 17 Fixing plate for DPX ³ 160 and DPX ³ 250 For vertical mounting
			203 18 1/4 turn metal faceplate for DPX ³ Height 300 mm

Red catalogue numbers: New products



XL³ 800
equipment selection

Device	Fixing	Position	Configuration
XL ³ 800 - 24 modules			
FIXING ON PLATE			
DPX ³ 160 (Combination possible with DPX ³ 250)	Cabinet or enclosure	vertical	without side motor operator
			with side motor operator
		horizontal	direct rotary handle
			manual supply inverter
DPX ³ 250 and DPX ³ 160-125 electronic release (Combination possible with DPX ³ 160)	Cabinet or enclosure	vertical	automatic supply inverter
			with or without integrated e.l.c.bs
		horizontal	without side motor operator
			with side motor operator
DPX 250 (Combination possible with DPX 630)	Cabinet or enclosure	vertical	direct rotary handle
			manual supply inverter
		horizontal	automatic supply inverter
			with or without integrated e.l.c.bs
DPX 630 (Combination possible with DPX 250)	Cabinet or enclosure	vertical	1 to 3 devices, no e.l.c.bs
			1 to 3 devices with downstream e.l.c.bs
		horizontal	supply inverter + motor operators
			with or without downstream e.l.c.bs
DPX 1600	Cabinet or enclosure	vertical	with or without downstream e.l.c.bs + motor operators
		horizontal	1 to 3 devices, no e.l.c.bs
XL ³ 800 - 36 modules			
FIXING ON PLATE			
DPX ³ 160	Cabinet or enclosure	vertical	1 to 3 devices with downstream e.l.c.bs
			without side motor operator
			with side motor operator
DPX ³ 250	Cabinet or enclosure	vertical	manual supply inverter
			without side motor operator
			with side motor operator
DPX 250	Cabinet or enclosure	vertical	manual supply inverter
			no e.l.c.bs
DPX 630	Cabinet or enclosure	vertical	with downstream e.l.c.bs
			no e.l.c.bs
DPX 1600	Cabinet or enclosure	vertical	with downstream e.l.c.bs
			device only
			device only



206 11
Fixing plate equipped with a rail for DPX³, vertical mounting




206 17
Fixing plate for DPX³ 250, horizontal mounting




208 13
1/4 turn metal faceplate DPX³ 160, horizontal mounting



Fixing plate	Faceplate for devices		
	Height (mm)	1/4 turn	screw
XL³ 800 - 24 modules			
206 11 + 421 071	300	208 10	209 10
206 11 + 421 068	300	208 10	209 10
206 08 + 421 071	300	208 05	209 05
206 11 + 421 058	300	208 10	209 10
206 13 + 420 558	300	208 10	209 10
206 15	150	208 13	209 13
206 11 + 421 072	300	208 10 ⁽²⁾	209 10
206 11 + 421 069	300	208 10 ⁽²⁾	209 10
206 08 + 421 072	300	208 05	209 05
206 11 + 421 058	300	208 10 ⁽²⁾	209 10
206 13 + 421 058	300	208 10 ⁽²⁾	209 10
206 17	200	208 17	209 17
206 20	400	208 20	209 20
206 22	600	208 22	209 22
206 68 ⁽¹⁾	400	-	-
206 24	200	208 24	209 24
206 21	200	-	209 24
206 20	400	208 20	209 20
206 22	600	208 22	209 22
206 23	300	208 23	209 21
206 30	400	208 30	209 30
206 30	400	208 34	209 34
XL³ 800 - 36 modules			
206 61 + 421 071	300	-	209 60
206 61 + 421 068	300	-	209 60
206 61 + 420 559	300	-	209 60
206 61 + 421 072	300	-	209 60
206 61 + 421 072	300	-	209 60
206 61 + 420 559	300	-	209 60
206 70	400	-	209 70
206 72	600	-	209 72
206 70	400	-	209 70
206 72	600	-	209 72
206 80	400	-	209 80
206 80	400	-	209 84

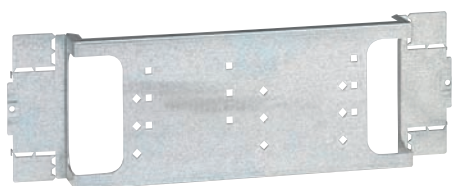

206 24
Fixing plate for DPX 250 with or without e.l.c.bs, horizontal mounting



208 34
1/4 turn metal faceplate DPX 1600, horizontal mounting

(1) Faceplate supplied with the kit
(2) When the MCCB is equipped with terminal shields, use 400 mm height faceplate Cat.No 209 27

Red catalogue numbers: New products



XL³ 4000 equipment selection

Device	Version	Position	Configuration	Connection terminals
FIXING ON PLATE				
DPX ³ 160 (Combination possible with DPX ³ 250)	fixed	vertical	without side motor-operator	front
			with side motor-operator	front
			without front motor-operator	front or rear
			with front motor-operator	front or rear
			with rotary handle	front
			manual supply inverter	front
	draw-out	vertical	automatic supply inverter	front
			-	front or rear
			with or without front motor-operator	front or rear
		horizontal	with or without front motor-operator	front or rear
			with rotary handle	front or rear
			manual or automatic supply inverter	front or rear
DPX ³ 250 (Combination possible with DPX ³ 160 thermal-magnetic)	fixed	vertical	with or without front motor-operator	front or rear
			without side motor-operator	front
			with side motor-operator	front
			without front motor-operator	front or rear
			with front motor-operator	front or rear
			with rotary handle	front
	draw-out	vertical	manual supply inverter	front
			automatic supply inverter	front
			-	front or rear
		horizontal	with or without front motor-operator	front or rear
			with or without front motor-operator	front or rear
			with rotary handle	front or rear
horizontal	manual or automatic supply inverter	front or rear		
	with or without front motor-operator	front or rear		
	with or without front motor-operator	front or rear		



206 11

Fixing plate equipped with a rail for DPX³, vertical mounting



421 071

Rail fixing adaptor for DPX³



206 17


Fixing plate for DPX³ 250, horizontal mounting



XL ³ 4000 - 24 modules								XL ³ 4000 - 36 modules				
Spacer	Fixing device	Plate	Metal faceplate				Fixing device	Plate	Metal faceplate			
			Height (mm)	1/4 turn	Screw	Lock			Height (mm)	Screw	Lock	
-	-	206 11 + 421 071	300	208 10	209 10	-	-	206 61 + 421 071	300	209 60	-	
-	-	206 11 + 421 068	300	208 10	209 10	-	-	206 61 + 421 068	300	209 60	-	
207 50	207 90	207 49	300	208 10	209 10	-	207 61	207 49	300	209 60	-	
-	207 90	207 49	300	208 10	209 10	-	207 61	207 49	300	209 60	-	
-	-	206 08 + 421 071	300	208 05	209 05	-	-	-	-	-	-	
207 50	207 90	207 49	300	208 05	209 05	-	207 61	207 49	300	209 65	-	
-	-	206 11 + 421 058	300	208 10	209 10	-	-	-	-	-	-	
207 50	206 63	206 71	300	208 10	209 10	-	-	-	-	-	-	
-	-	206 13 + 421 058	300	208 10	209 10	-	-	-	-	-	-	
-	206 63	206 71	300	208 10	209 10	-	-	-	-	-	-	
-	-	206 15	150	208 13	209 13	-	-	-	-	-	-	
-	-	207 94	150	208 13	209 13	-	-	-	-	-	-	
207 50	207 91	207 59	400	-	-	212 11	-	-	-	-	-	
-	207 91	207 59	400	-	-	212 08	-	-	-	-	-	
207 50	206 69	206 81	400	-	-	212 11	-	-	-	-	-	
-	-	207 95	200	-	-	212 13	-	-	-	-	-	
-	-	206 11 + 421 072	300	208 10	209 10	-	-	206 61 + 421 072	300	209 60	-	
-	-	206 11 + 421 069	300	208 10	209 10	-	-	206 61 + 421 069	300	209 60	-	
-	207 90	207 64	300	208 10	209 10	-	207 61	207 49	300	209 60	-	
207 50	207 90	207 64	300	208 10	209 10	-	207 61	207 49	300	209 60	-	
207 50	-	206 08 + 421 072	300	208 05	209 05	-	-	-	-	-	-	
207 50	207 90	207 64	300	208 05	209 05	-	207 61	207 49	300	209 65	-	
-	-	206 11 + 421 058	300	208 10	209 10	-	-	-	-	-	-	
207 50	206 63	206 73	300	208 10	209 10	-	-	-	-	-	-	
-	-	206 13 + 421 058	300	208 10	209 10	-	-	-	-	-	-	
-	206 63	206 73	300	208 10	209 10	-	-	-	-	-	-	
-	-	206 17	200	208 17	209 17	-	-	-	-	-	-	
-	-	207 96	200	208 17	209 17	-	-	-	-	-	-	
207 50	207 91	207 69	400	-	-	212 11	-	-	-	-	-	
-	207 91	207 69	400	-	-	212 08	-	-	-	-	-	
207 50	206 69	206 83	400	-	-	212 11	-	-	-	-	-	
-	-	207 97	200	-	-	212 13	-	-	-	-	-	




208 10
1/4 turn metal faceplate for DPX³ 160 and DPX³ 250, vertical mounting
Height 300 mm



209 10
Screw metal faceplate for DPX³ 160 and DPX³ 250, vertical mounting
Height 300 mm



208 13
1/4 turn metal faceplate for DPX³ 160, horizontal mounting on adjustable fixing plate
Height 150 mm



212 11
Lock metal faceplate for 1 to 3 DPX³ 160 or DPX³ 250 draw-out version, vertical mounting
Height 400 mm

Red catalogue numbers: New products



XL³ 4000 equipment selection

Device	Version	Position	Configuration	Connection terminals	Rotary handle/ motor-driven	
DPX 250	fixed	vertical	1 to 3 devices, no e.l.c.bs	front	-	
			1 to 3 devices, no e.l.c.bs	front or rear	with or without	
			1 to 3 devices with e.l.c.bs	front	-	
		horizontal	1 to 3 devices with e.l.c.bs with or without downstream e.l.c.bs	front or rear	with or without	
			with or without downstream e.l.c.bs	front	-	
			supply inverters	front or rear	with or without motor-driven	
	plug-in	vertical	1 to 3 devices, no e.l.c.bs	front or rear	with or without	
		horizontal	1 to 3 devices, with e.l.c.bs with or without downstream e.l.c.bs	front or rear	with or without	
	draw-out	vertical	no e.l.c.bs	front or rear	with or without rotary handle	
			no e.l.c.bs	front or rear	motor-driven	
			with e.l.c.bs	front or rear	with or without rotary handle	
		horizontal	with e.l.c.bs with or without downstream e.l.c.bs	front or rear	motor-driven	
			with or without downstream e.l.c.bs	front or rear	with or without rotary handle	
			with or without e.l.c.bs	front or rear	motor-driven	
	vertical	supply inverters	front or rear	-		
		supply inverters	front or rear	motor-driven		
	DPX 630	fixed	vertical	1 to 3 devices, no e.l.c.bs	front	-
				1 to 3 devices, no e.l.c.bs	front or rear	with or without
1 to 3 devices, with e.l.c.bs				front	-	
horizontal			1 to 3 devices, with e.l.c.bs with or without downstream e.l.c.bs	front or rear	with or without	
			with or without downstream e.l.c.bs	front	-	
			with or without downstream e.l.c.bs	front or rear	with or without motor-driven	
plug-in		vertical	1 to 2 devices, no e.l.c.bs	front or rear	with or without	
		horizontal	1 to 2 devices, with e.l.c.bs with or without downstream e.l.c.bs	front or rear	with or without rotary handle	
draw-out		vertical	no e.l.c.bs	front or rear	with or without rotary handle	
			no e.l.c.bs	front or rear	motor-driven	
			with e.l.c.bs	front or rear	with or without rotary handle	
		horizontal	with e.l.c.bs with or without downstream e.l.c.bs	front or rear	motor-driven	
			with or without downstream e.l.c.bs	front or rear	with or without rotary handle	
			with or without e.l.c.bs	front or rear	motor-driven	
vertical		supply inverters	front or rear	-		
		supply inverters	front or rear	motor-driven		
DPX 1600		fixed	vertical	no e.l.c.bs	front	-
				no e.l.c.bs	front	rotary handle or motor-driven
	no e.l.c.bs			rear	-	
	horizontal		no e.l.c.bs	rear	rotary handle or motor-driven	
			no e.l.c.bs	front	-	
			no e.l.c.bs	front	motor-driven	
			no e.l.c.bs	rear	motor-driven	
			no e.l.c.bs	rear	-	
			no e.l.c.bs	rear	rotary handle	
	horizontal	supply inverters	front or rear	-		
		supply inverters	front or rear	motor-driven		
		supply inverters	front or rear	motor-driven		
	draw-out	vertical	no e.l.c.bs	front	-	
			no e.l.c.bs	front	rotary handle or motor-driven	
			no e.l.c.bs	front	-	
		horizontal	no e.l.c.bs	rear	rotary handle or motor-driven	
			supply inverters	rear	-	
			supply inverters	rear	motor-driven	

(1) No height spacer if motor-driven
(2) 2 sets of spacers for adjustable plate
(3) NB: New catalogue numbers starting from June 2011, please contact us




XL ³ 4000 - 24 modules													XL ³ 4000 - 36 modules				
Spacer	Fixing device	Plate	Metal faceplate				Fixing device	Plate	Faceplate								
			Height (mm)	1/4 turn	Screw	Lock			Height (mm)	Screw	Lock						
	-	206 20	400	208 20	209 20	-	-	206 70	400	209 70	-	-					
207 50 ⁽¹⁾	207 20	207 75	400	208 20	209 20	-	207 70	207 75	400	209 70	-	-					
	-	206 22	600	208 22	209 22	-	-	206 72	600	209 72	-	-					
207 50 ⁽¹⁾	207 22	207 76	600	208 22	209 22	-	207 72	207 76	600	209 72	-	-					
	-	206 24	200	208 24	209 24	-	-	-	-	-	-	-					
	-	207 24	200	-	209 24	-	-	-	-	-	-	-					
207 50 ⁽¹⁾	-	206 74	400	-	209 74	-	-	-	-	-	-	-					
	207 21	207 77	400	-	-	212 20	-	-	-	-	-	-					
	207 23	207 78	600	-	-	212 22	-	-	-	-	-	-					
	-	207 27	200	-	-	212 24	-	-	-	-	-	-					
207 50	207 21	207 77	400	-	-	212 21	-	-	-	-	-	-					
207 50	207 21	207 77	400	-	-	212 02	-	-	-	-	-	-					
207 50	207 23	207 78	600	-	-	212 23	-	-	-	-	-	-					
207 50	207 23	207 78	600	-	-	212 03	-	-	-	-	-	-					
	-	207 26	300	-	-	212 26	-	-	-	-	-	-					
	-	207 26	300	-	-	212 27	-	-	-	-	-	-					
207 50	-	206 74	400	-	-	212 90	-	-	-	-	-	-					
207 50	-	206 74	400	-	-	212 91	-	-	-	-	-	-					
	-	206 20	400	208 20	209 20	-	-	206 70	400	209 70	-	-					
207 50 ⁽¹⁾	207 20	207 85	400	208 20	209 20	-	207 70	207 85	400	209 70	-	-					
	-	206 22	600	208 22	209 22	-	-	206 72	600	209 72	-	-					
207 50 ⁽¹⁾	207 22	207 86	600	208 22	209 22	-	207 72	207 86	600	209 72	-	-					
	-	206 23	300	208 23	209 21	-	-	-	-	-	-	-					
	-	207 93	300	-	209 23	-	-	-	-	-	-	-					
207 50 ⁽¹⁾	-	206 74	400	-	209 76	-	-	-	-	-	-	-					
	207 21	207 87	400	-	-	212 20	-	-	-	-	-	-					
	207 23	207 88	600	-	-	212 22	-	-	-	-	-	-					
	-	207 98	300	-	-	212 17	-	-	-	-	-	-					
207 50	207 21	207 87	400	-	-	212 21	-	-	-	-	-	-					
207 50	207 21	207 87	400	-	-	212 04	-	-	-	-	-	-					
207 50	207 23	207 88	600	-	-	212 23	-	-	-	-	-	-					
207 50	207 23	207 88	600	-	-	212 05	-	-	-	-	-	-					
	-	207 98	300	-	-	212 18	-	-	-	-	-	-					
	-	207 98	300	-	-	212 19	-	-	-	-	-	-					
207 50	-	206 76	400	-	-	212 94	-	-	-	-	-	-					
207 50	-	206 76	400	-	-	212 95	-	-	-	-	-	-					
	-	206 30 ⁽³⁾	400	208 30 ⁽³⁾	209 30 ⁽³⁾	-	-	206 80 ⁽³⁾	400	209 80 ⁽³⁾	-	-					
207 50 ⁽¹⁾⁽²⁾	-	207 30 ⁽³⁾	400	-	209 32 ⁽³⁾	-	-	-	-	-	-	-					
207 50 ⁽¹⁾⁽²⁾	-	207 32 ⁽³⁾	400	208 30 ⁽³⁾	209 30 ⁽³⁾	-	-	207 82 ⁽³⁾	400	209 80 ⁽³⁾	-	-					
207 50 ⁽¹⁾⁽²⁾	-	207 32 ⁽³⁾	400	-	209 32 ⁽³⁾	-	-	-	-	-	-	-					
	-	206 30	400	208 34	209 34	-	-	206 80	400	209 84	-	-					
	-	206 30	400	-	209 36	-	-	-	-	-	-	-					
	-	206 30	400	-	209 35	-	-	-	-	-	-	-					
207 50 ⁽¹⁾⁽²⁾	-	207 36	400	208 34	209 34	-	-	-	-	-	-	-					
207 50 ⁽¹⁾⁽²⁾	-	207 36	400	-	209 35	-	-	-	-	-	-	-					
	-	206 86	800	-	209 86	-	-	-	-	-	-	-					
	-	206 86	800	-	209 87	-	-	-	-	-	-	-					
	-	207 31	400	-	-	212 31	-	-	-	-	-	-					
	-	207 31	400	-	-	212 32	-	-	-	-	-	-					
	-	207 35	400	-	-	212 34	-	-	-	-	-	-					
	-	207 35	400	-	-	212 35	-	-	-	-	-	-					
	-	206 87	800	-	-	212 36	-	-	-	-	-	-					
	-	206 87	800	-	-	212 37	-	-	-	-	-	-					




DPX³ 160 thermal magnetic

Dimensions

Fixed version

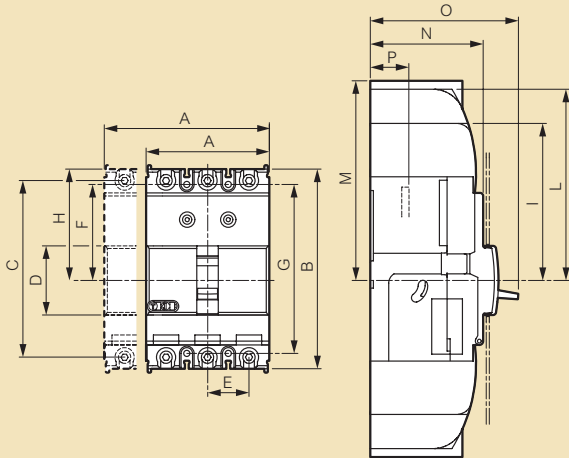


Fixed version with earth leakage module

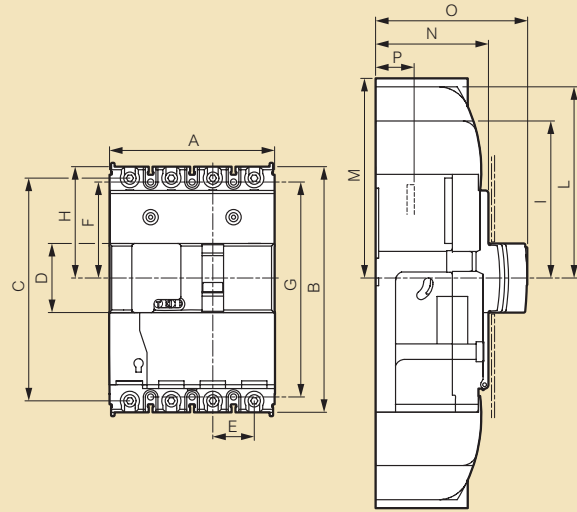


	A	B	C	D	E	F	G	H	I	L	M	N	O	P
3P	81	130	115	45	27	62,5	110	72,5	102,5	125	-	74	100	18
4P	108	130	115	45	27	62,5	110	72,5	102,5	125	-	74	100	18
e.l.c.bs	108	160	145	45	27	62,5	140	72,5	102,5	125	-	74	100	18

Plug-in version

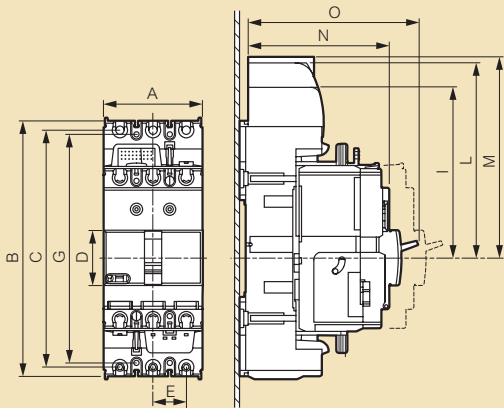

Plug-in version with earth leakage module

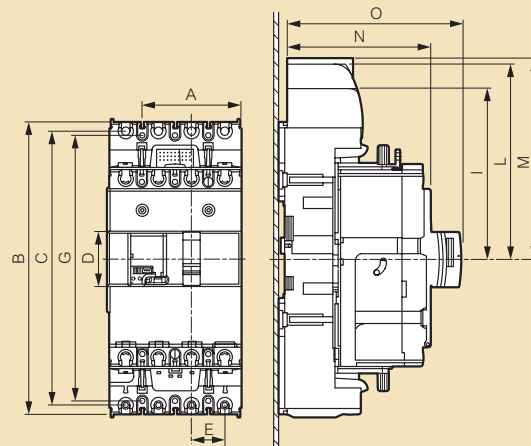


	A	B	C	D	E	F	G	H	I	L	M	N	O	P
3P	81	208	193	45	27	100,5	186	111,5	141,5	164	-	122	148	-
4P	108	238	223	45	27	100,5	216	111,5	141,5	164	-	122	148	-
e.l.c.bs	108	230	223	45	27	100,5	216	111,5	141,5	164	-	122	148	-




DPX³ 250 thermal magnetic and electronic release

Dimensions

Fixed version

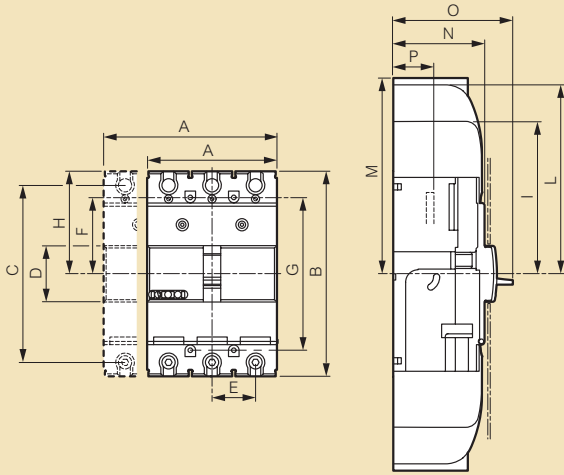


Fixed version with earth leakage module

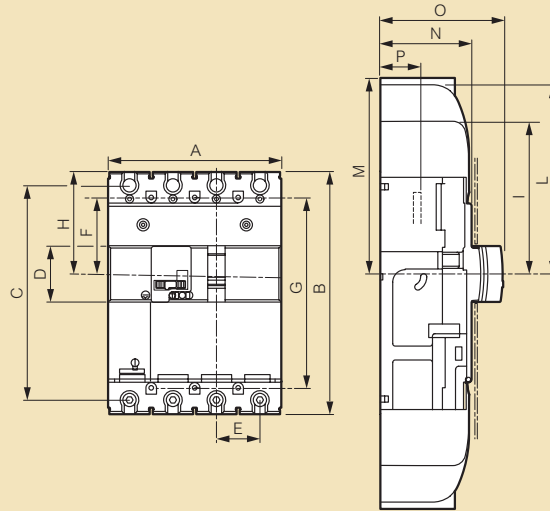


	A	B	C	D	E	F	G	H	I	L	M	N	O	P
3P	105	165	142,5	45	35	61,5	123	82,5	112,5	150	-	74	100	18
4P	140	165	142,5	45	35	61,5	123	82,5	112,5	150	-	74	100	18
e.l.c.bs	140	195	172,5	45	35	61,5	153	82,5	112,5	150	-	74	100	18

Plug-in version

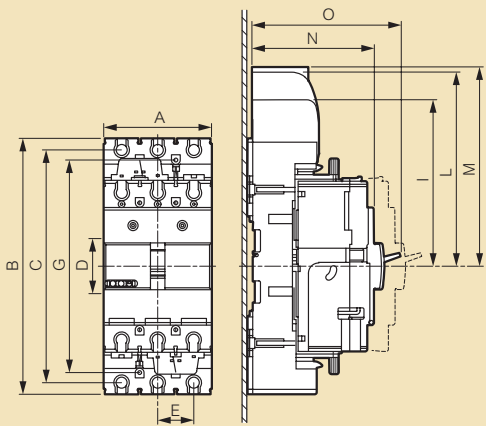

Plug-in version with earth leakage module

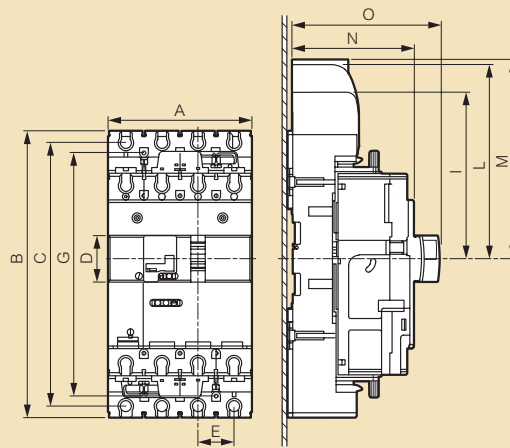


	A	B	C	D	E	F	G	H	I	L	M	N	P
3P	105	248	225,5	45	35	103	206	150	180	217,5	-	122	148
4P	140	278	225,5	45	35	103	236	150	180	217,5	-	122	148
e.l.c.bs	140	278	225,5	45	35	103	236	150	180	217,5	-	122	148



DPX³ 160/250 accessories


Dimensions

Direct rotary handles Cat.Nos 421 000/001/002/003

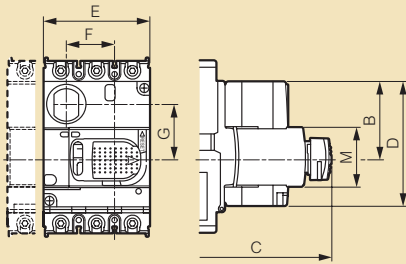


	A	B	C	D	E	F	G	H _{min}	H _{max}	I	L	M
160	122	57	155	94	80,5	36,5	41,7	132	361	62	74	45
160 with e.l.c.bs	122	57	155	94	93	36,5	41,7	132	361	62	74	45
250	122	57	155	94	80,5	40,5	41,7	132	361	62	74	45
250 with e.l.c.bs	122	57	155	94	93	40,5	41,7	132	361	62	74	45
250 electronic release	122	57	155	94	93	40,5	41,7	132	361	62	74	45
250 electronic release with e.l.c.bs	122	57	155	94	93	40,5	41,7	132	361	62	74	45

Vari-depth rotary handles Cat.Nos 421 004/005

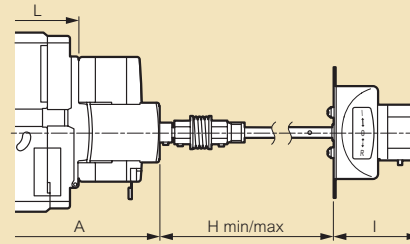


Front motor-driven handle Cat.No 421 061

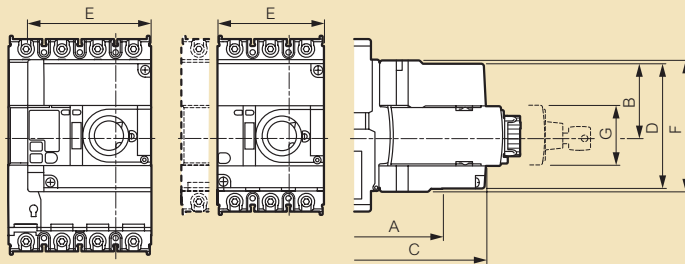


	A	B	C	D	E	F	G	H
160	125	54,5	154	94	80,5	99	45	74
160 with e.l.c.bs	125	54,5	154	94	93	99	45	74
250	125	54,5	154	94	80,5	99	45	74
250 with e.l.c.bs	125	54,5	154	94	93	99	45	74
250 electronic release	125	54,5	154	94	93	99	45	74
250 electronic release with e.l.c.bs	125	54,5	154	94	93	99	45	74

Rear terminals Cat.Nos 421 036/037/038/039

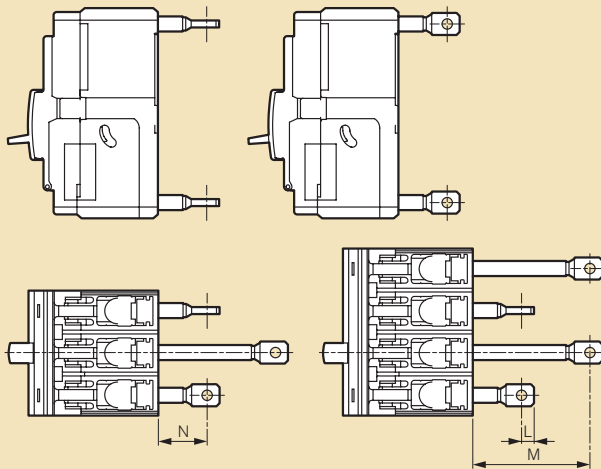

Incoming spreaders Cat.Nos 421 032/033/034/035

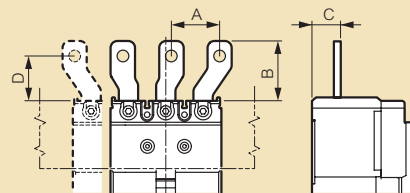


	A	B	C	D
160	35	41	23	33
160 with e.l.c.bs	35	41	23	33
250	48,5	55	23	39
250 with e.l.c.bs	48,5	55	23	39




DPX™ 250

n Dimensions


Fixed version, front terminals

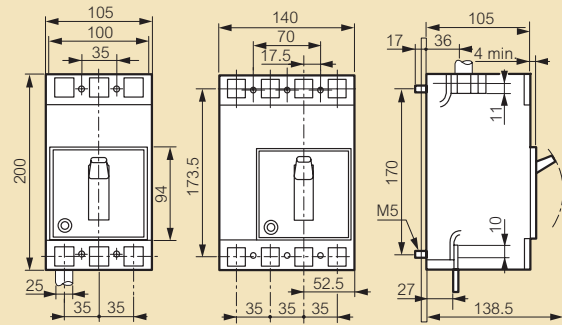


Fixed version with earth leakage module mounted underneath⁽¹⁾

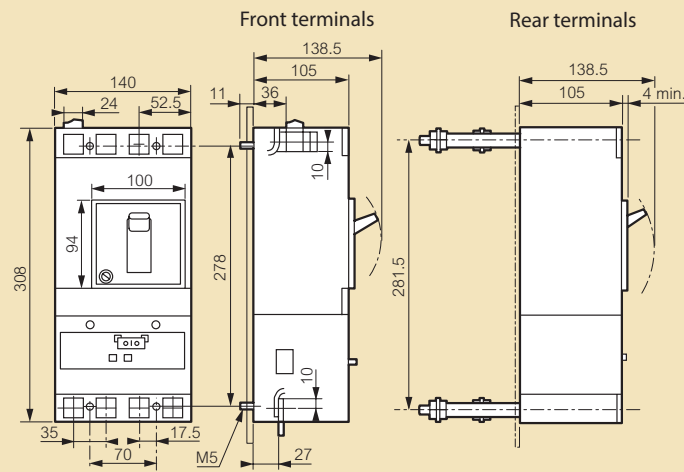


Plug-in version, front terminals

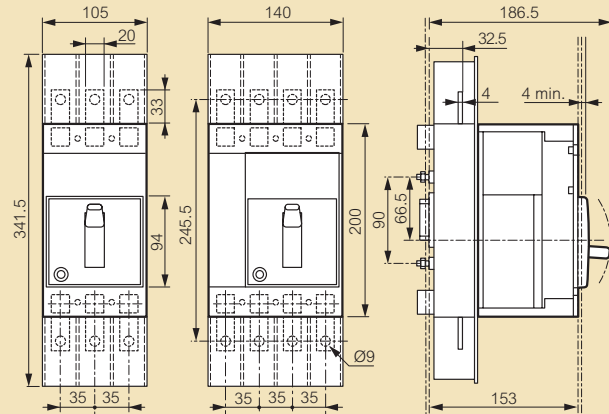


Plug-in version, rear terminals

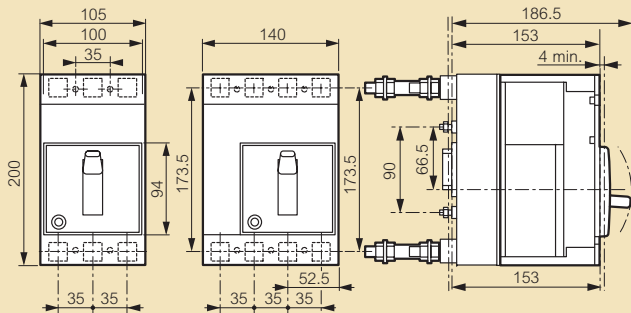


Draw-out version, front terminals

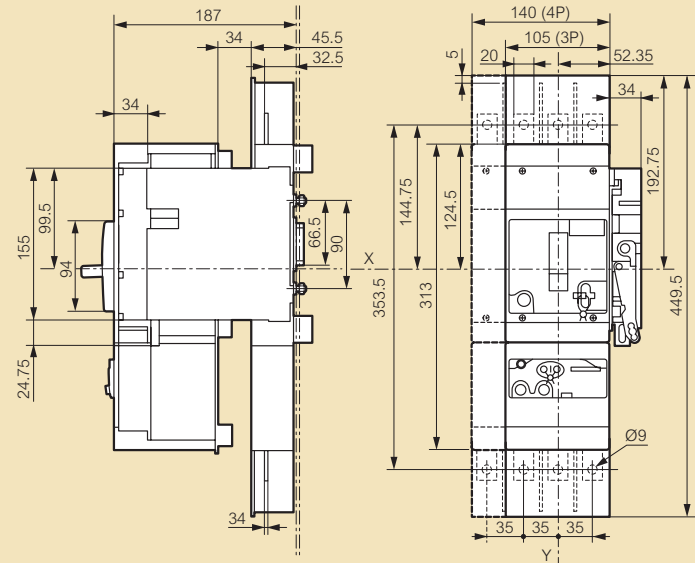


Draw-out version, rear terminals

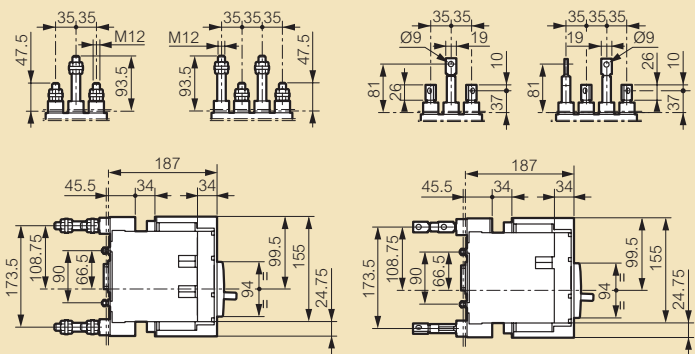

Rotary handle-direct on DPX

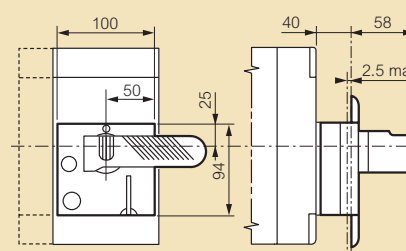


Terminal shields



	A
DPX 250	330
DPX 250 + earth leakage module	438

Rotary handle-vari-depth on door

Mounting with flexible seal

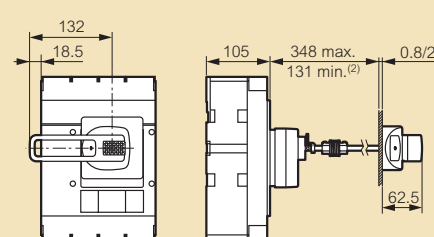


(1) Dimensions of 3-pole earth leakage modules are the same as 4-pole earth leakage modules
 (2) 75 mm without mechanical system




n Dimensions


Fixed version, front terminals

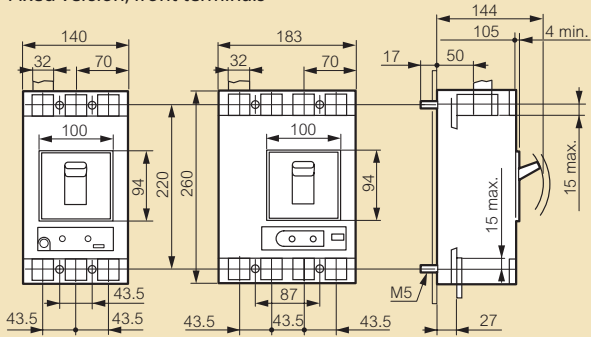


Fixed version with earth leakage module mounted underneath

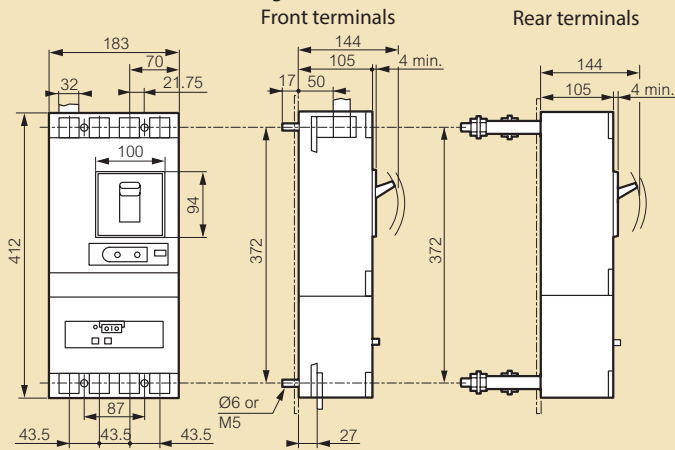


Plug-in version, front terminals

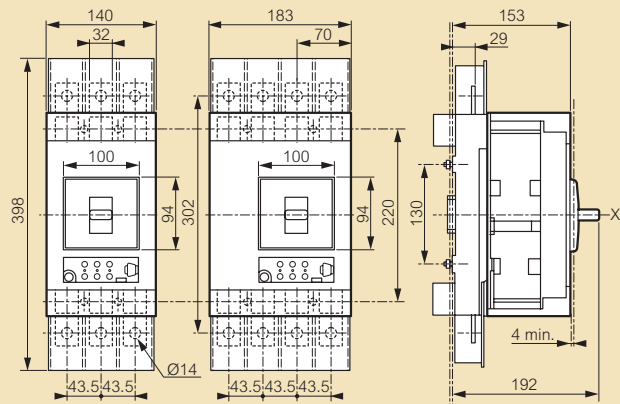


Plug-in version, rear terminals

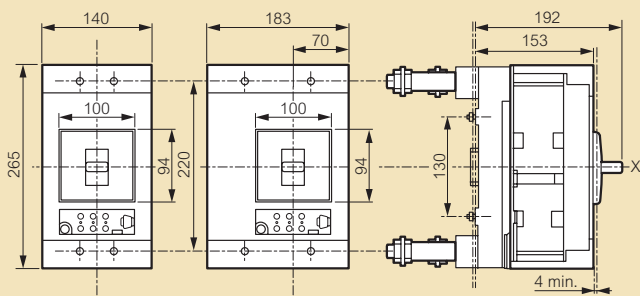


Draw-out version, front terminals

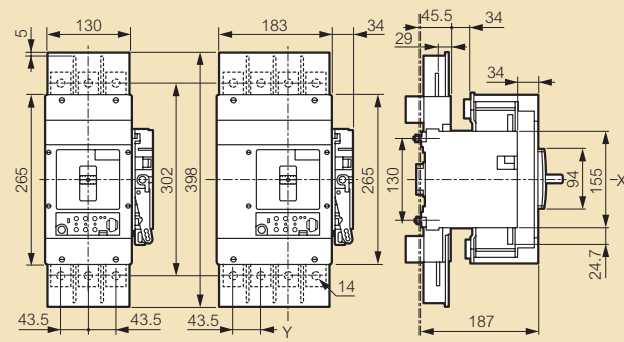


Draw-out version, rear terminals
Rear terminal with threaded rod

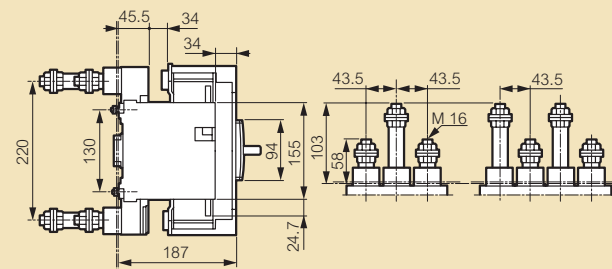

Flat rear terminal

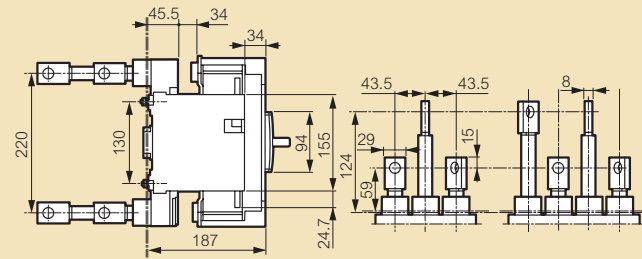


Rotary handle-direct on DPX

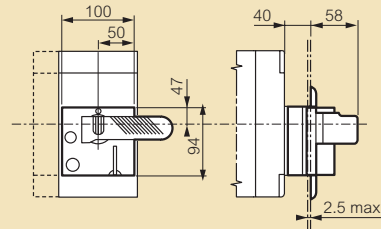

Terminal shields

	A
DPX 630	390
DPX 630 + earth leakage module	542

Rotary handle-vari-depth handle on door
Mounting with flexible seal

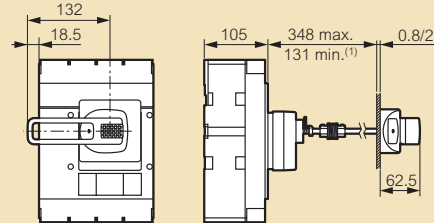


(1) 75 mm without mechanical system




DPX™ 1600

n Dimensions


Fixed version, front terminals

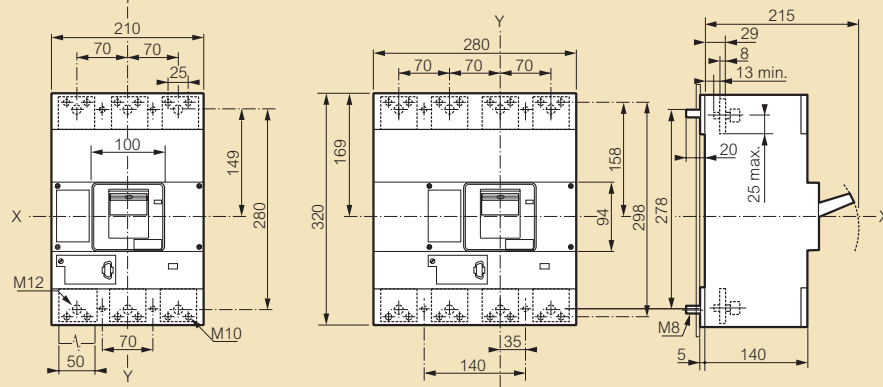


Fixed version, rear terminals

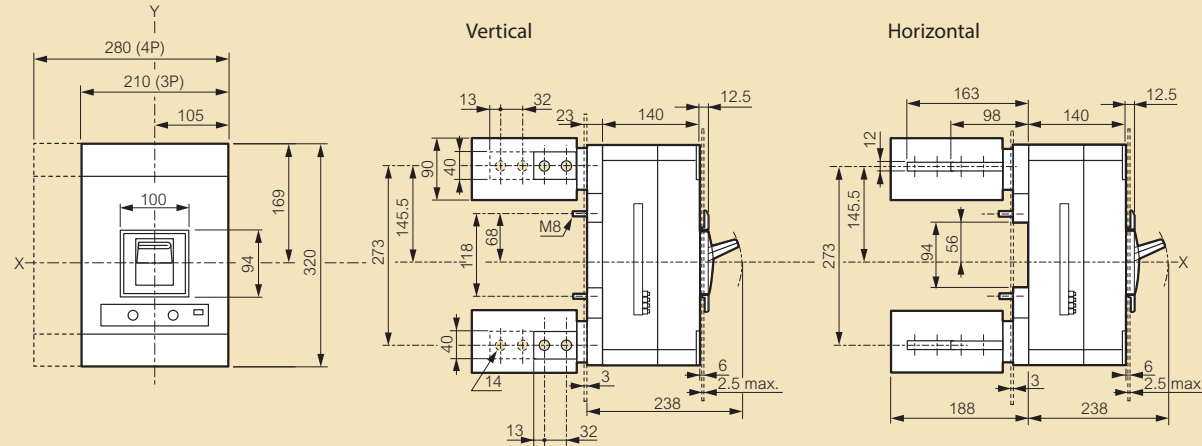


Draw-out version, rear terminals

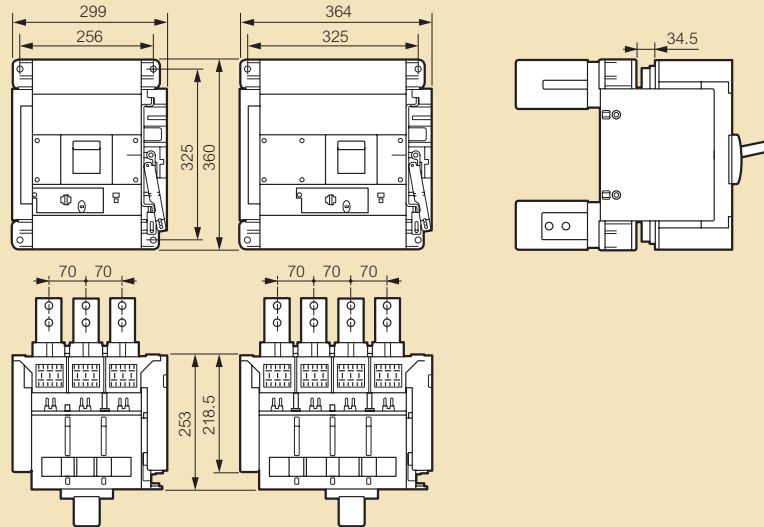


Terminal shields

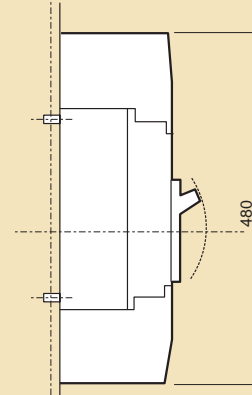

Rotary handle-direct on DPX

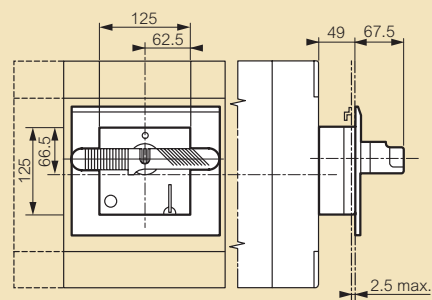

Rotary handle-vari-depth handle on door

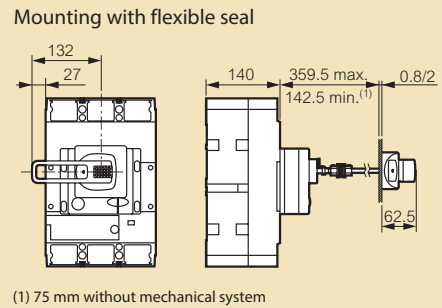

DPX³ 160/250

n Technical characteristics (at 40°)

MCCBs		DPX ³ 160 thermal magnetic				DPX ³ 160 with electronic earth leakage module			
		16 kA	25 kA	36 kA	50 kA	16 kA	25 kA	36 kA	50 kA
Nominal current In (A)		16-25-40-63-80-100-125-160				16-25-40-63-80-100-125-160			
Rated insulation voltage (V)	50-60Hz	800				600			
Rated operational voltage (V)	50-60Hz	690				500			
	Continuous	500				500			
Rated impulse withstand current Uimp (kV)		8				8			
Category of use		A				A			
Ultimate breaking capacity (kA) in AC	220/240 V~	25	35	50	65	25	35	50	65
	380/415 V~	16	25	36	50	16	25	36	50
	440 V~	10	18	25	30	10	18	25	30
	480/500 V~	8	10	12	15	8	10	12	15
	690 V~	5	5	8	10	5	5	8	10
Ultimate breaking capacity (kA) in DC	125 V _{DC} ⁽¹⁾	32	50	60	80	32	50	60	80
	250 V _{DC} ⁽¹⁾	16	25	30	40	16	25	30	40
	400 V _{DC} ⁽²⁾	16	25	30	40	16	25	30	40
	500 V _{DC} ⁽²⁾	10	20	25	35	10	20	25	35
Standard breaking capacity Ics (% Icu)		100	100	100	100	100	100	100	100
Short-circuit making capacity Icm (kA)	415 V~	32	52,5	75,6	105	32	52,5	75,6	105
Breaking capacity on 1 pole Isu (kA) For IT neutral earthing system	220/240 V~	6,25	8,75	12,5	16,3	6,25	8,75	12,5	16,3
	380/415 V~	4	6,25	9	12,5	4	6,25	9	12,5
	440 V~	2,5	4,5	6,25	7,5	2,5	4,5	6,25	7,5
	480/500 V~	2	2,5	3	3,75	2	2,5	3	3,75
	690 V~	1,25	1,25	2	2,5	1,25	1,25	2	2,5

MCCBs		DPX ³ 250 thermal magnetic				DPX ³ 250 electronic release			
		25 kA	36 kA	50 kA	70 kA	25 kA	36 kA	50 kA	70 kA
Nominal current In (A)		100-160-200-250				40-100-160-250			
Rated insulation voltage (V)	50-60Hz	800 (with integrated e.l.c.bs: 500)				800 (with integrated e.l.c.bs: 600)			
Rated operational voltage (V)	50-60Hz	690 (with integrated e.l.c.bs: 500)				690 (with integrated e.l.c.bs: 500)			
	Continuous	500				500			
Rated impulse withstand current Uimp (kV)		8				8			
Category of use		A				A			
Ultimate breaking capacity (kA) in AC	220/240 V~	40	60	80	100	40	60	80	100
	380/415 V~	25	36	50	70	25	36	50	70
	440 V~	20	30	40	60	20	30	40	60
	480/500 V~	10	25	30	40	10	25	30	40
	690 V~	8	16	18	20	8	16	-	20
Ultimate breaking capacity (kA) in DC	125 V _{DC} ⁽¹⁾	50	72	80	90	50	72	80	90
	250 V _{DC} ⁽¹⁾	25	36	40	45	25	36	40	45
	400 V _{DC} ⁽²⁾	30	45	50	55	30	45	50	55
	500 V _{DC} ⁽²⁾	25	36	40	45	25	36	40	45
Standard breaking capacity Ics (% Icu)		100	100	100	100	100	100	100	100
Breaking capacity on 1 pole Isu (kA) For IT neutral earthing system	220/240 V~	10	15	20	25	15	15	20	25
	380/415 V~	6,25	9	12,5	17,5	6,25	9	12,5	17,5
	440 V~	5	7,5	10	15	5	7,5	10	15
	480/500 V~	2,5	6,25	7,5	10	2,5	6,25	7,5	10
	690 V~	2	4	4,5	5	-	-	-	-

n Temperature derating

DPX³ 160

In (A)	Temperature (°C)											
	-25	-20	-10	-5	0	10	20	30	40	50	60	70
16	23	22	21	21	20	19	18	17	16	15	15	14
25	37	35	34	33	32	30	28	26	25	23	22	21
40	55	54	52	51	50	47	43	42	40	38	36	34
63	88	87	84	83	81	76	69	66	63	60	57	55
80	115	113	111	109	107	97	87	84	80	78	75	72
100	135	133	130	123	115	108	100	100	100	95	90	85
125	160	158	155	153	150	138	125	125	125	118	112	105
160	224	221	214	210	205	192	176	168	160	152	145	139

DPX³ 250

In (A)	Temperature (°C)											
	-25	-20	-10	-5	0	10	20	30	40	50	60	70
40	54	53	51	50	49	48	45	41	40	38	36	34
100	135	132	128	126	123	120	112	102	100	94	90	84
160	216	211	205	201	197	192	179	163	160	151	143	134
200	270	264	256	251	246	240	224	203	200	189	179	168
250	338	330	320	314	308	300	280	254	250	236	224	210

(1) 2 poles in series
(2) 3 poles in series


n Derating at different altitudes

Altitude (m)	2000	3000	4000
Rated current (A)	1 x In	0,96 x In	0,93 x In
Rated voltage (V)	DPX ³ no e.l.c.bs	690	690
	DPX ³ with e.l.c.bs	500	500




DPX³ 160/250

n DPX³ 160 thermal-magnetic Tripping curve

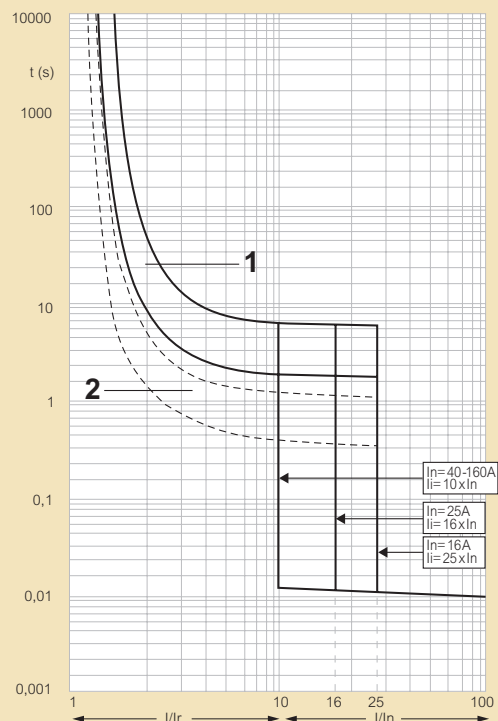


t: time
 I: rated current
 I_r: setting current
 Curve n°1: charateristic with cold start
 Curve n°2: charateristic with hot start

n DPX³ 250 thermal-magnetic Tripping curves

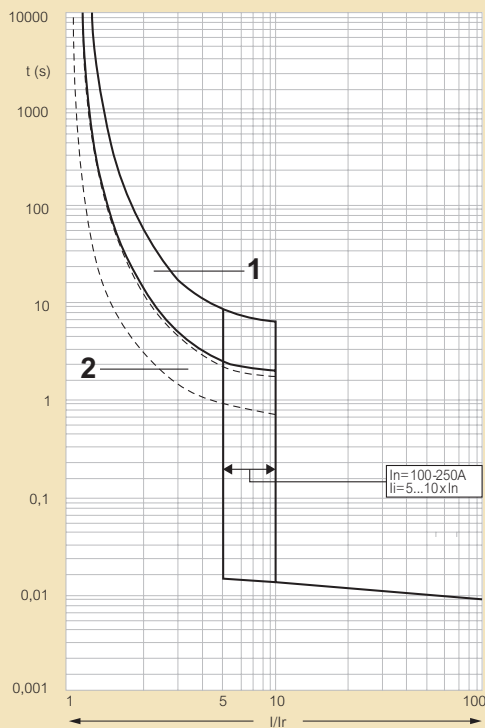


t: time
 I: rated current
 I_r: setting current
 Curve n°1: charateristic with cold start
 Curve n°2: charateristic with hot start

n DPX³ 160 thermal-magnetic with integrated e.l.c.bs Tripping curves

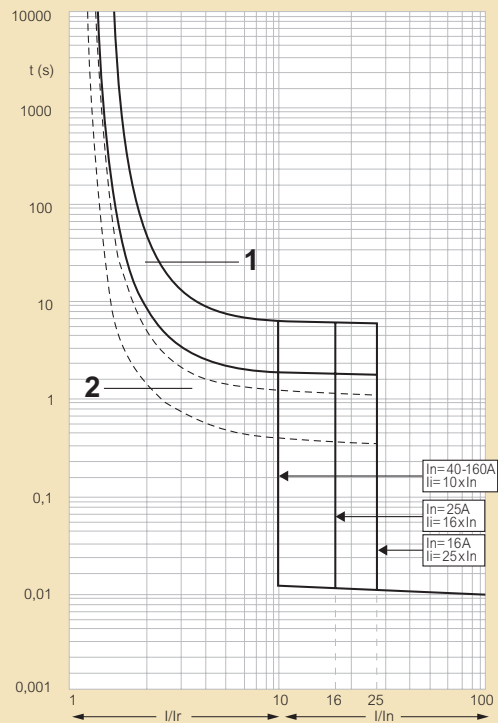

t: time
 I: rated current
 I_r: setting current
 Curve n°1: charateristic with cold start
 Curve n°2: charateristic with hot start

n DPX³ 250 thermal-magnetic with integrated e.l.c.bs

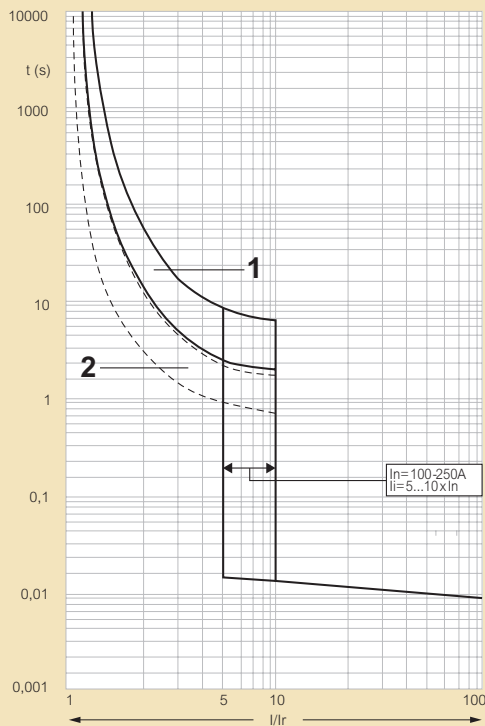


t: time
 I: rated current
 I_r: setting current



DPX³ 160/250 (continued)

n DPX³ 250 electronic release Tripping curves

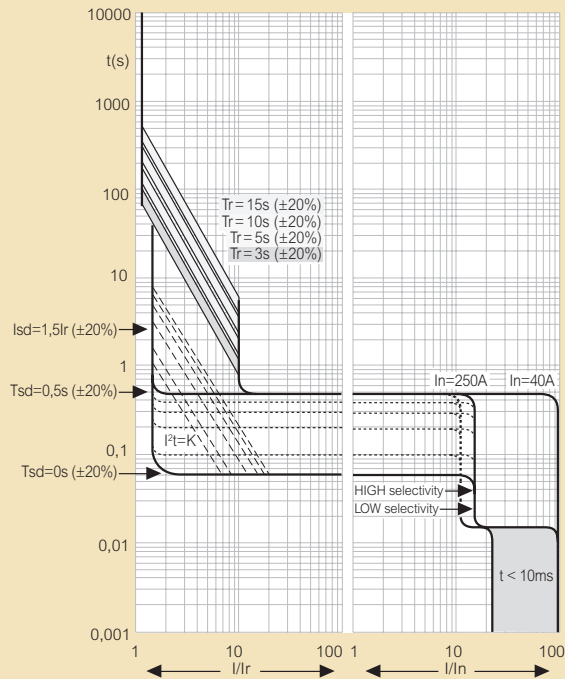

n Adjustment for thermal-magnetic DPX³

Setting	DPX ³ thermal magnetic	DPX ³ with integrated e.l.c.bs
I _r overload trip threshold (thermal)	0.4 to 1 I _n	0.4 to 1 I _n
I _m short-circuit trip threshold (magnetic)	fixed: 10 I _n ⁽¹⁾	fixed: 10 I _n ⁽¹⁾
I _{Δn} (A)	-	0.03 - 0.03 - 1 - 3
Δt (s)	-	0 - 0.3 - 1 - 3

(1) 400 A for DPX³ 160 In 16 A and 25 A


n Adjustment for DPX³ electronic release

Setting	DPX ³	DPX ³ with integrated e.l.c.bs
I _r overload trip threshold (long delay)	0.4 to 1 I _n	
T _r long delay trip time	3 - 5 - 10 - 15s	
I _m short-circuit trip threshold (short delay)	1.5 - 2 - 2.5 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 x I _r	
T _m short delay trip time	0.01 - 0.1 - 0.2 - 0.3 - 0.4 - 0.5s	
I _g	(0.2 - 0.3 - 0.4 - 0.5 - 0.6 - 0.7 - 0.8 - 1 - OFF) x I _n	
T _g	0.1 - 0.2 - 0.5 - 1s	

DPXTM

reading DPX characteristic curves and adjustment ranges

n Tripping curve for a DPX thermal-magnetic trip

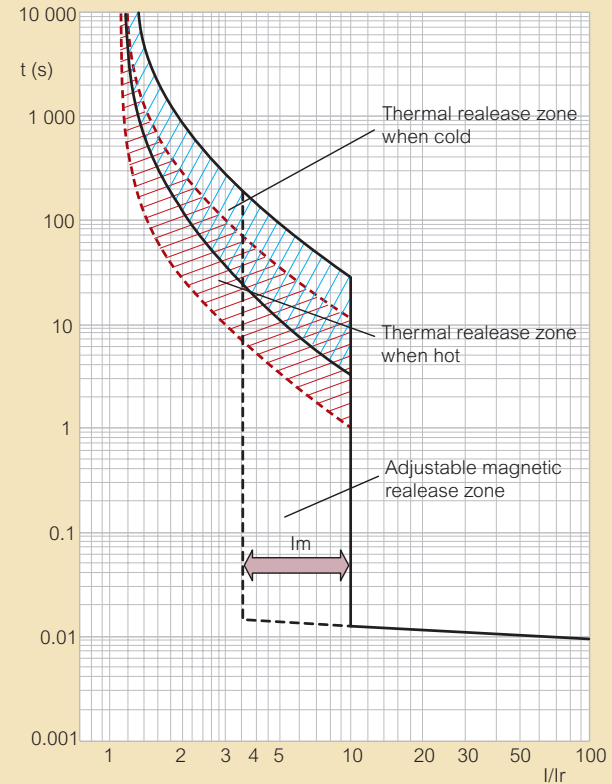


I: actual current
 I_r: thermal protection against overloads (setting: I_r = x I_n)
 I_m: magnetic protection against short-circuits (setting: I_m = x I_n or I_m = x I_r)
 As the abscissa of the curves represents the ratio I/I_r, modifying the setting of I_r will not change the graphical representation of the thermal trip. However, the magnetic setting can be read directly (between 3.5 and 10 in the example).



DPX™


reading DPX characteristic curves and adjustment ranges

n Tripping curve for a DPX electronic release S1, adjustable Ir and Isd

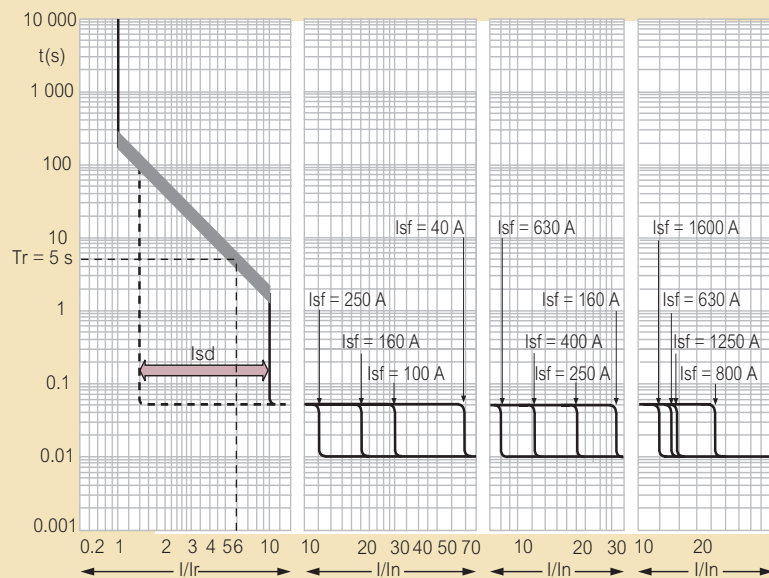

I: actual current
 Ir: long delay protection against overloads (setting: $I_r = x I_n$)
 Isd: long delay protection operation time (fixed value: 5 s at 6 Ir)
 Isd: short delay protection against short-circuits (setting: $I_m = x I_r$, between 1.5 and 10 Ir in the example)
 Tsd: short delay protection operation time (fixed value: 0.05 s)
 If: fixed threshold instantaneous protection (4 to 20 kA depending on model)

n Tripping curve for a DPX electronic release S2, adjustable Ir, Isd, Tr and Tsd

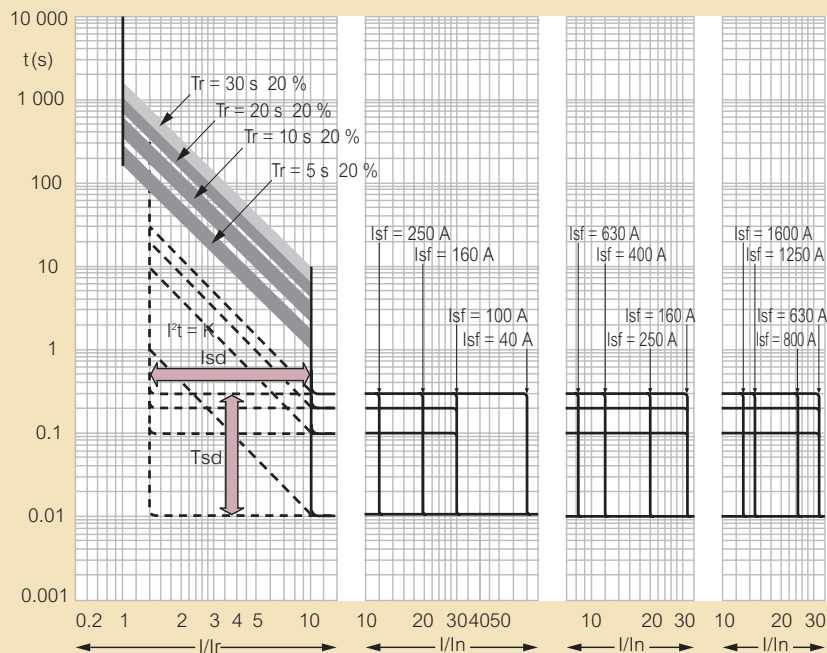

I: actual current
 Ir: long delay protection against overloads (setting: $I_r = x I_n$)
 Tr: long delay protection operation time (fixed value: 5 to 30 s)
 Isd: short delay protection against short-circuits (setting: $I_m = x I_r$, between 1.5 and 10 Ir in the example)
 Tsd: short delay protection operation time (setting: 0 to 0.3 s)
 I²t constant (adjustable via Tm)
 If: fixed threshold instantaneous protection (4 to 20 kA depending on model)

n Adjustment for thermal-magnetic DPX

Setting	DPX 250	DPX 630	DPX 1600
Ir overload trip threshold (thermal)	0.64 to 1 In	0.8 to 1 In	0.8 to 1 In
Im short-circuit trip threshold (magnetic)	3.5 to 10 In	5 to 10 In	5 to 10 In

n Adjustment for DPX electronic release

Setting	DPX 250 / 630 / 1600 S1	DPX 250 / 630 / 1600 S2
Ir overload trip threshold (long delay)	$0.4 - 0.5 - 0.6 - 0.7 - 0.8 - 0.9 - 0.95 - 1) \times I_n$	
Tr long delay trip time	fixed: 5 s (to 6 Ir)	5 - 10 - 20 - 30 s (to 6 Ir)
Im short-circuit trip threshold (short delay)	$(1.5 - 2 - 3 - 4 - 5 - 6 - 8 - 10) \times I_r^{(1)}$	
Tm Short delay trip time	fixed: 0.05 s	0 - 0.1 - 0.2 - 0.3 s

(1) 7.9 Ir for DPX 630 In 630 A





Setiabudi Building II Lt. 6 Suite 603
JL. H.R. Rasuna Said, Kav 62
Jakarta 12920
Telp : (+62-21) 525 0608
Fax : (+62-21) 525 5935
E-mail : sales.indonesia@legrand.co.id

Bandung :
Komp. Setrasari Plaza II /A 11
Bandung 40152
Telp : (+62-22) 202 0751
Fax : (+62-22) 201 1460
E-mail : legrand.bandung@legrand.co.id

Surabaya :
G Walk Shop House W2 No.22
Citraland, Surabaya - Indonesia
Telp. : (+62-31) 5743 1080 (Hunting)
Fax. : (+62-31) 5743 1081
E-mail : legrand.surabaya@legrand.co.id

Medan :
Jl. Thamrin 20 B
Medan - Indonesia
Telp. : (+62-61) 451 7396, 451 7431
Fax. : (+62-61) 451 7431
E-mail : legrand.medan@legrand.co.id

IDDPX13C/GB-EDITION JUL/13

