


GECO®

SOLAR ENERGY SYSTEMS






SOLAR ENERGY SYSTEM

RH-20A

Specification

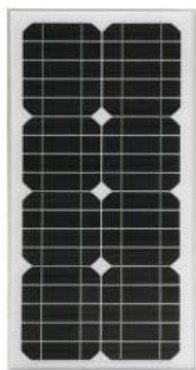

Power of solar panel	DC17V/20W	1pc	3.0KG/pc	650X306X17mm
Energy Board line	5m	1pc	0.3KG	
Controller Box:		1pc	13KG	240X210X220mm

Application Hours

solar panel

Vm(V)	17.2V	Voc(V)	21.4V
Im(A)	1.162A	Isc(A)	1.243A

5 hours sunshine generate 5.8Ah. One 12v/2w LED lamp can **light** 34.8 hours.

Controller Box

DC 12V outlet	Use for 12V DC lamp
DC 5V outlet	Digital Product Charge
DC 6V outlet	Digital Product Fast Charge

AC 220~240V 50Hz	American socket
	GS outlet

Controller	12V5A
------------	-------

Lead-Acid Battery	12V24Ah
-------------------	---------

Battery charged full. One 12v/2w LED lamp can light 100 hours.

Inverter

Input voltage: DC 12V	Output voltage: 220~240V
Over load protection: >300W	Output Max Power: 300W
Output Rated Power: 150W	

Package Dimension

Each Component packed individually

Controller Box : 320×230×255mm

Solar panels : 660X316X27mm

Net Weight : 16.5KG, Gross Weight: 17.5KG

Unit Price :

MOQ :

Terms and Conditions

Payment Terms	:
Shipment	:
Min. Order Quantity	:
Delivery date	:



SOLAR ENERGY SYSTEM

RH-40A

Specification



Power of solar panel	17.6V/40W	1pc	5.5KG/pc	630X541X30mm
Energy Board line	5m	2pc	1KG	
Controller Box:		1pc	13KG	240X210X220mm

Application Hours

solar panel

Vm(V)	17.6V	Voc(V)	21.8V
Im(A)	2.27A	Isc(A)	2.48A
5 hours sunshine generate 11.35Ah. One 12v/2w LED lamp can light 68 hours.			

Controller Box

DC 12V outlet	Use for 12V DC lamp
DC 5V outlet	Digital Product Charge
DC 6V outlet	Digital Product Fast Charge
AC 220~240V 50Hz	American socket GS outlet
Controller	12V5A
Lead-Acid Battery	12V24Ah
Battery charged full. One 12v/2w LED lamp can light 100 hours.	
Inverter	
Input voltage: DC 12V	Output voltage: 220~240V
Over load protection: >300W	Output Max Power: 300W
Output Rated Power: 150W	

Package Dimension

Each Component packed individually
Controller Box: 320×230×255mm
Solar panels: 640X551X40mm
Net Weight: 19.5KG, Gross Weight: 20.5KG

Unit Price :

MOQ :

Terms and Conditions

Payment Terms	:
Shipment	:
Min. Order Quantity	:
Delivery date	:



SOLAR ENERGY SYSTEM

RH-80A

Specification

Power of solar panel	17.2V/80W	1pc	8KG/pc	1195X541X30mm
Energy Board line	5m	2pc	1KG	
Controller Box:		1pc	30KG	450X220X300mm

Application Hours

solar panel

Vm(V)	17.2V	Voc(V)	21.6V
Im(A)	4.65A	Isc(A)	5A
5 hours sunshine generate 23.25Ah. One 12v/2w LED lamp can light 139.5 hours.			

Controller Box

DC 12V outlet	Use for 12V DC lamp
DC 5V outlet	Digital Product Charge
DC 6V outlet	Digital Product Fast Charge

AC 220~240V 50Hz	American socket
	GS outlet

Controller	12V5A
------------	-------

Lead-Acid Battery	12V70Ah
-------------------	---------

Battery charged full. One 12v/2w LED lamp can light 294 hours.

Inverter

Input voltage: DC 12V	Output voltage: 220~240V
Over load protection: >500W	Output Max Power: 500W
Output Rated Power: 250W	

Package Dimension

Each Component packed individually

Controller Box : 555×315×515mm

Solar panels : 1205X551X40mm

Net Weight : 39KG, Gross Weight: 40.5KG

Unit Price :

MOQ :

Terms and Conditions

Payment Terms	:
Shipment	:
Min. Order Quantity	:
Delivery date	:



SOLAR ENERGY SYSTEM

RH-160A

Specification



Power of solar panel	17.2V/80W	2pc	8KG/pc	1195X541X30mm
Energy Board line	5m	4pc	1KG	
Controller Box:		1pc	38.5KG	450X220X300mm

Application Hours

solar panel

2pc

Vm(V)	17.2V	Voc(V)	21.6V
Im(A)	4.65A	Isc(A)	5A
5 hours sunshine generate 46.5Ah. One 12v/2w LED lamp can light 279 hours.			

Controller Box

DC 12V outlet	Use for 12V DC lamp
DC 5V outlet	Digital Product Charge
DC 6V outlet	Digital Product Fast Charge
AC 220~240V 50Hz	American socket GS outlet
Controller	12V10A
Lead-Acid Battery	12V100Ah
Battery charged full. One 12v/2w LED lamp can light 420 hours.	
Inverter	
Input voltage: DC 12V	Output voltage: 220~240V
Over load protection: >500W	Output Max Power: 500W
Output Rated Power: 250W	

Package Dimension

Each Component packed individually	
Controller Box::	555×315×515mm
Solar panels	: 1205X551X80mm
Net Weight	: 47.5KG, Gross Weight: 49KG

Unit Price :

MOQ :

Terms and Conditions

Payment Terms	:
Shipment	:
Min. Order Quantity	:
Delivery date	:



SOLAR ENERGY SYSTEM

RS-10D	Specification				
	Power of solar panel	DC 17V/10W	1pc	1.80KG/pc	360X305X16mm
	Controller	12V/5A	1pc	0.15KG	
	Lead-Acid Battery	12V/7AH	1pc	2.2KG	
	LED Lamp	12V/2W	2pc	1.0KG	With 5meters wire
	Application				
	Applications		Hours for using		
	Battery charged 1 day by the sunshine				
	LED Lamp 2W 1pc		16hours		
	LED Lamps 2W 2pcs		8hours		
	Battery is charged full of electricity				
	LED Lamp 2W 1pc		30hours		
	LED Lamps 2W 2pcs		15hours		
	After discharged completely, battery can be charged full by 2days (illumination time: 5hours)				
	Package Dimension				
	Solar panels: 370X315X25mm,				
	Lamp: 160X160x180mm 2pc				
	Controller: 100X30X140mm				
	Battery: 170X80X120mm				
	Each Component packed individually, then packed in one big carton				
	Dimension of Big Carton : 380X330X170mm				
	Net Weight : 6.5KG, Gross Weight: 8.5KG				
	Unit Price :				
	MOQ :				

Terms and Conditions

Payment Terms :
 Shipment :
 Min. Order Quantity :
 Delivery date :



SOLAR ENERGY SYSTEM

RB-5A

Specification



Portable power	1pc	2.6KG/pc	268×125×202mm
Power adapter	1pc	0.3KG	

Application Hours

Power adapter

input voltage: AC 220V	Output voltage: 14~16V
Maximum current : 500MA	
The charge for an hour, storage power 0.5Ah	

Portable power

Color	Sparkling+Silver grey
DC 12V outlet	Use for 12V DC lamp
USB outlet	Digital Product Charge
Charging outlet	Charge for Portable power
Lead-Acid Battery	12V4Ah
When the battery is full, the front light can be bright time of up to 267 hours; the side light can be bright time of up to 120 hours.	
Radio frequency range	87.5-108MHz
Front light	3LED each LED 1500-2000mcd
Side light	8LED each LED 1000-1500mcd
Solar panel	18V4W

Package Dimension

1PC/ COLORBOX; 6PCS/CTN
Color box : 310×160×245mm
Out box : 490X320X500mm
Net Weight: 18KG, Gross Weight: 19KG

Unit Price :

MOQ :

Terms and Conditions

Payment Terms :
Shipment :
Min. Order Quantity :
Delivery date :



SOLAR ENERGY SYSTEM

RB-5B

Specification



Portable power	1pc	2.6KG/pc	268×125×202mm
Power adapter	1pc	0.3KG	
Cable	1pc	0.2KG	1m

Application Hours

Power adapter

input voltage: AC 220V	Output voltage: 14~16V
Maximum current : 500MA	
The charge for an hour, storage power 0.5Ah	

Portable power

Color	White porcelain+Grass Green
DC 12V outlet	Use for 12V DC lamp
USB outlet	Digital Product Charge
Charging outlet	Charge for Portable power
Lead-Acid Battery	12V4Ah
When the battery is full, the light can be bright time of up to 120 hours.	
Radio frequency range	87.5-108MHz
Light	8LED each LED 1000-1500mcd
Solar panel	18V4W

Package Dimension

1PC/ COLORBOX; 6PCS/CTN
Color box : 200×140×380mm
Out box : 430X410X390mm
Net Weight: 18KG, Gross Weight: 19KG

Unit Price :

MOQ :

Terms and Conditions

Payment Terms	:
Shipment	:
Min. Order Quantity	:
Delivery date	: